
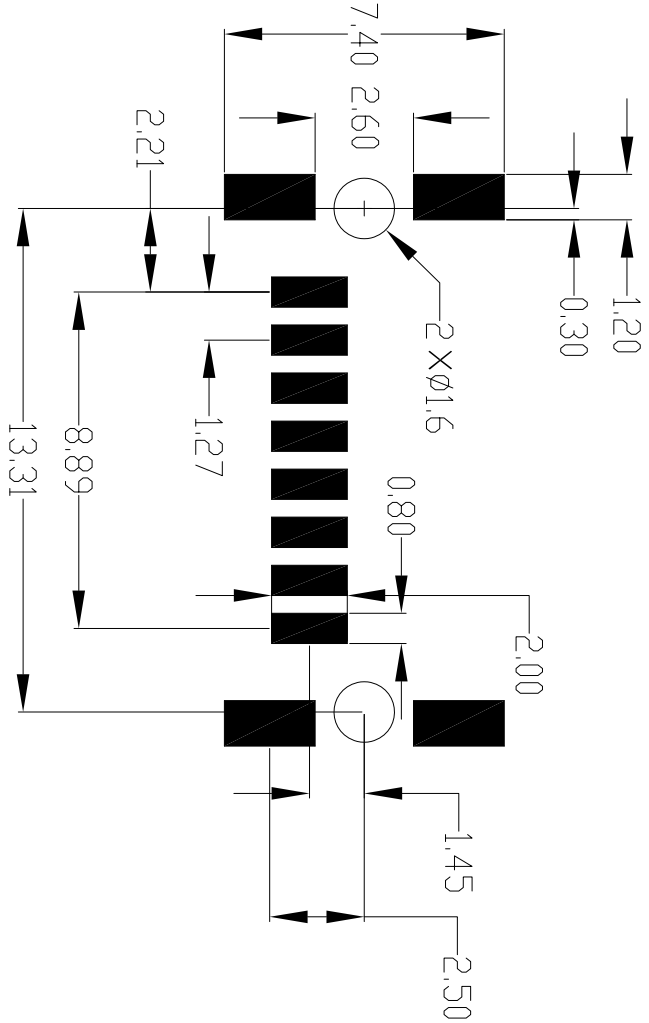
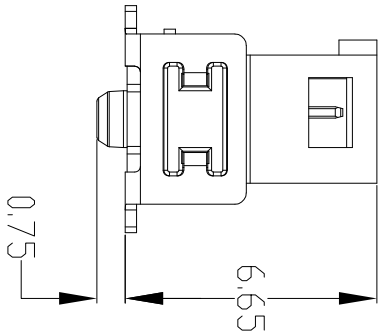





GENERAL TOLERANCE							
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

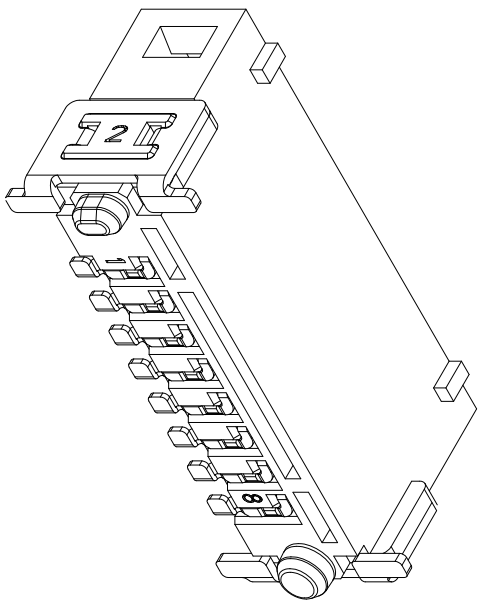

RECOMMENDED PCB-LAYOUT

CUSTOMER DRAWING


REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-06-30

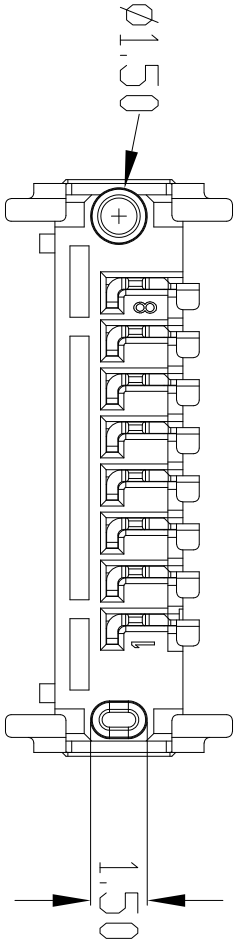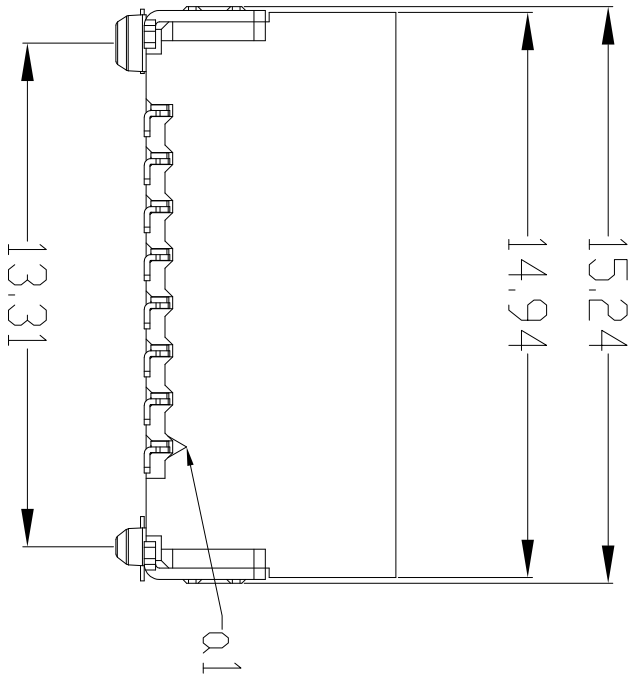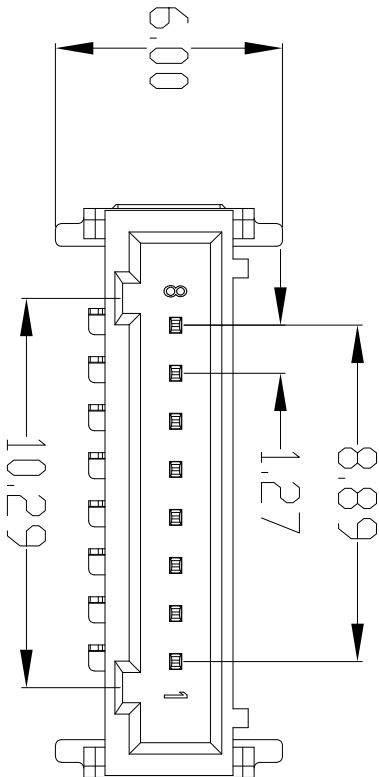

RECOMMENDED PCB-LAYOUT

NOTES:

- THE PRODUCTS ARE ROHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC, UL94 V-0, BLACK COLOR.
CONTACT: COPPER ALLOY, MATING AREA GOLD PLATING, OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION	NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS		MATERIAL SPEC.		APPROVALS		DATE	上海良速电子有限公司 Powerlite 1.27mm Single Row 8pin V Male SMT Connector U	
TOLERANCES: ANGLES: ±2°		SEE NOTES 2		PREPARED BY JUSTIN LI				
DEFAULT LINEAR TOLERANCES SEE TABLE		PROCESS SPEC.		ENGINEER IN CHARGE TYLER QIU		Jun-30-20		
DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000;				DESIGN MANAGER TYLER QIU				
LEGENDS:		THIRD ANGLE PROJECTION		THIRD ANGLE PROJECTION				
--								
 =FLAG NOTE CALL OUT REFERENCE ONLY				SIZE C		DOCUMENT NO.	PL-MW08101	REV/ A
				SCALE:		REF.	SHEET 1 OF 1	