

4







3

2

GENERAL TOLERANCE							SURFACE FINISH
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400		
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-06-30

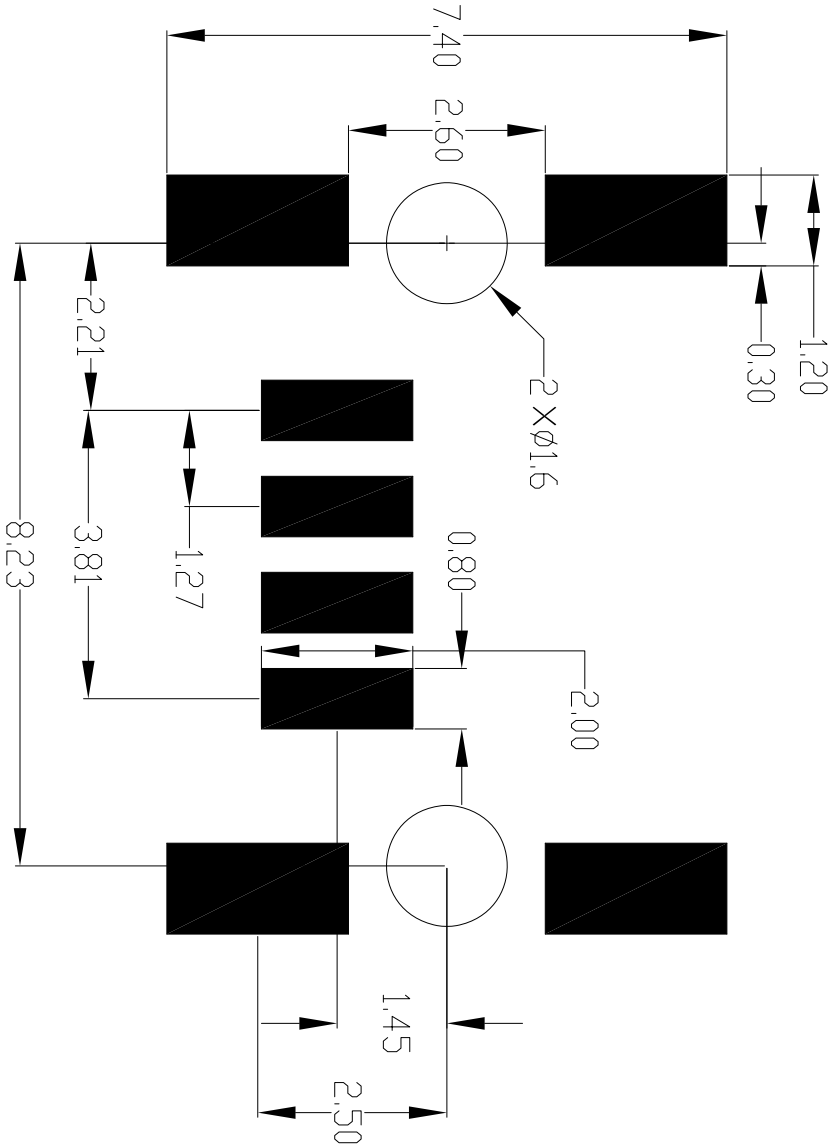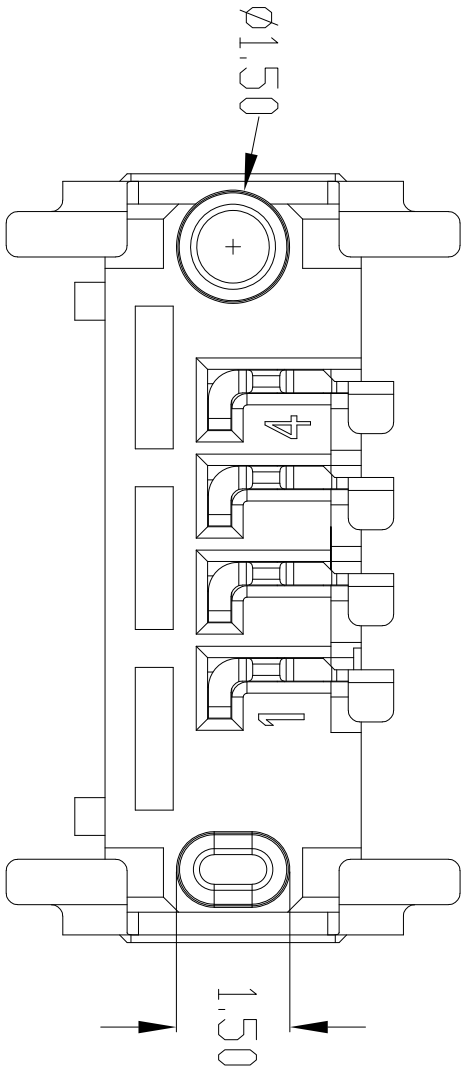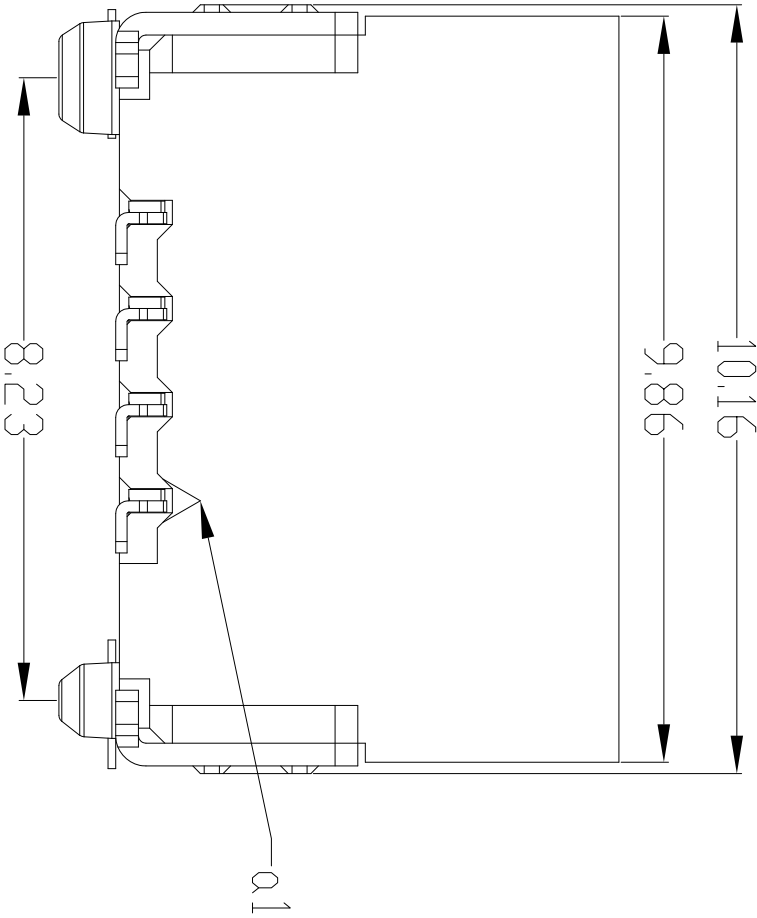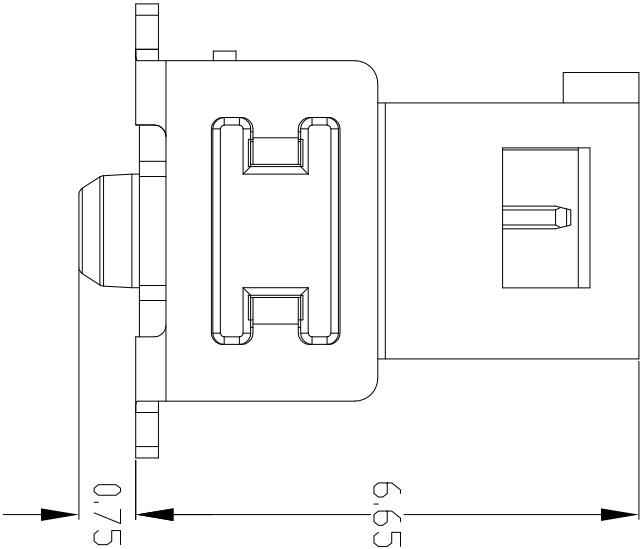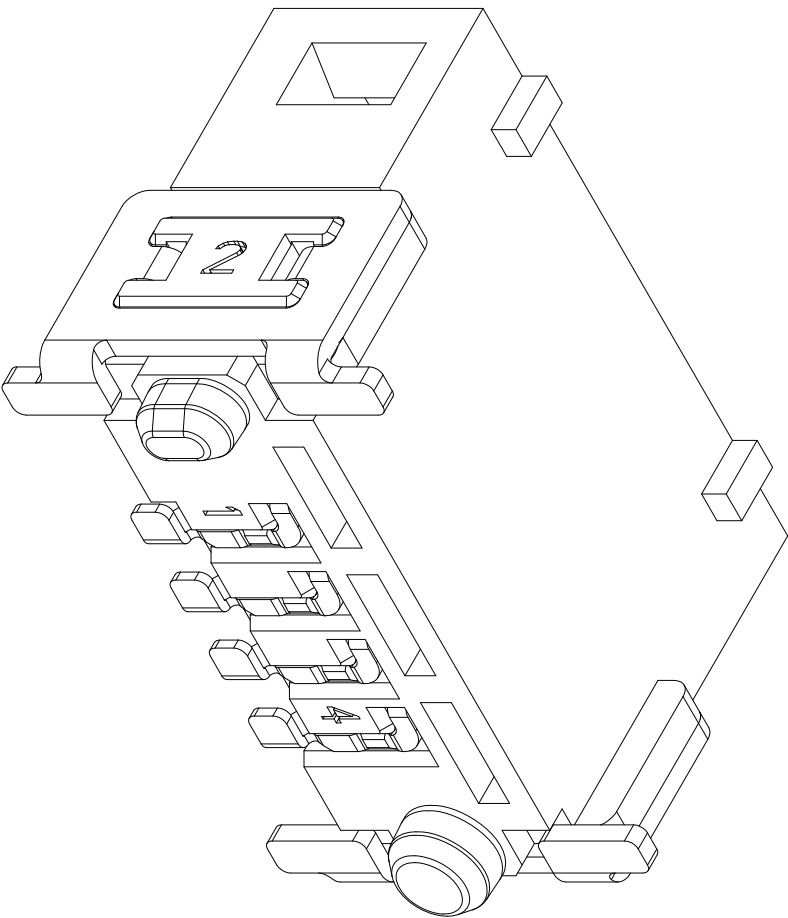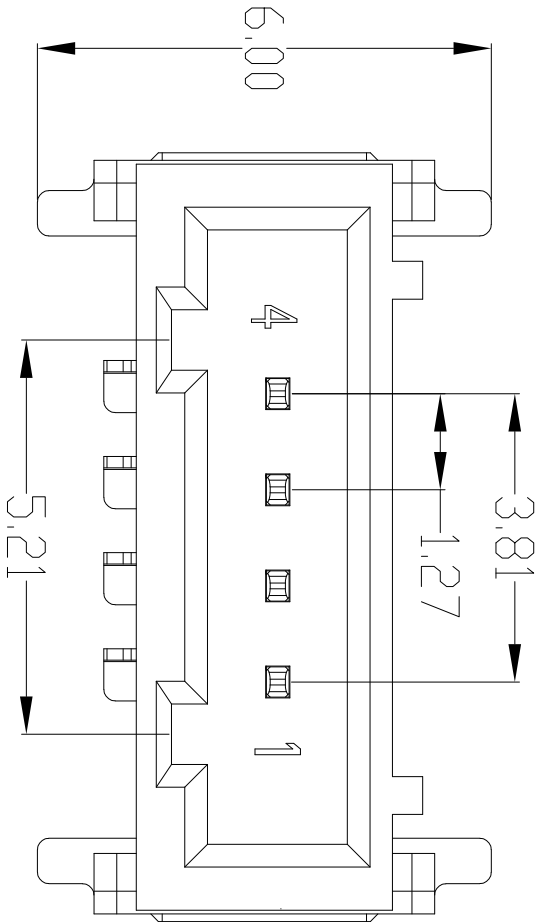

RECOMMENDED PCB-LAYOUT

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION		NOTE
LINEAR DIMENSIONS ARE IN:		MATERIAL SPEC.		APPROVALS		DATE		上海良速电子有限公司	
MILLIMETERS		SEE NOTES 2		PREPARED BY JUSTIN LI		Jun-30-20		Powerlite	
TOLERANCES:		ANGLES: ±2°		ENGINEER IN CHARGE TYLER QIU				1.27mm Single Row 4pin V Male SMT Connector	
DEFAULT LINEAR TOLERANCES SEE TABLE		DIM. & TOL. PER ASME Y14.5M-1994;		DESIGN MANAGER TYLER QIU				U	
DRM PER MIL-DTL-31000;		PROCESS SPEC.		THIRD ANGLE PROJECTION					
LEGENDS:		--							
=FLAG NOTE CALL OUT									
REFERENCE ONLY									

NOTES:

1. THE PRODUCTS ARE ROHS COMPLIANCE.
2. MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC, UL94 V-0, BLACK COLOR.
CONTACT: COPPER ALLOY, MATING AREA GOLD PLATING, OTHER AREA TIN PLATING.

A

B

C

D

4

3

2

1