

4

3



2

GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6




CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-06-30


D

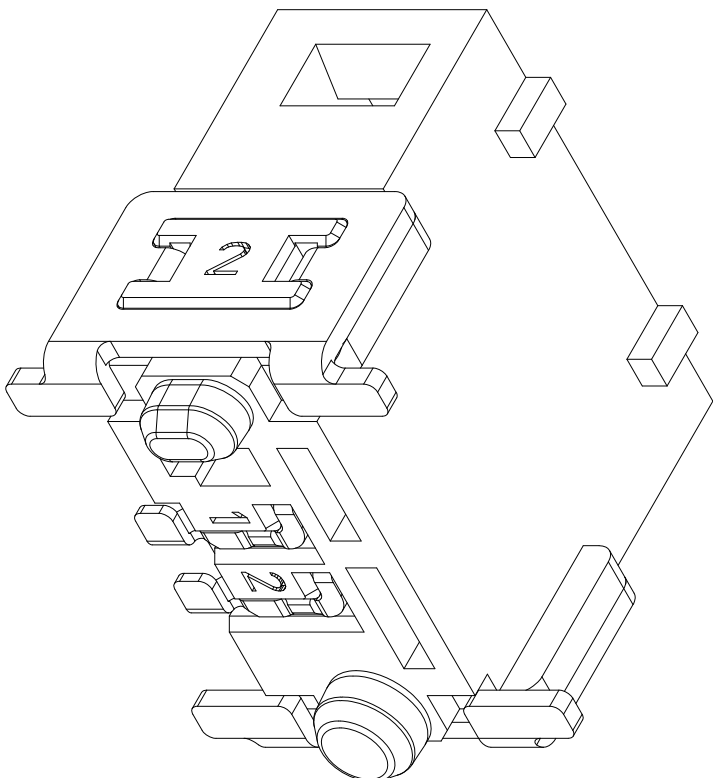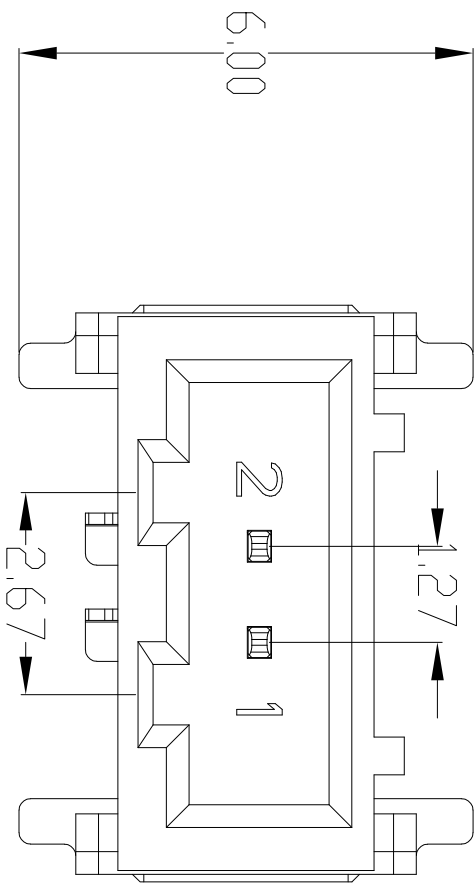

C

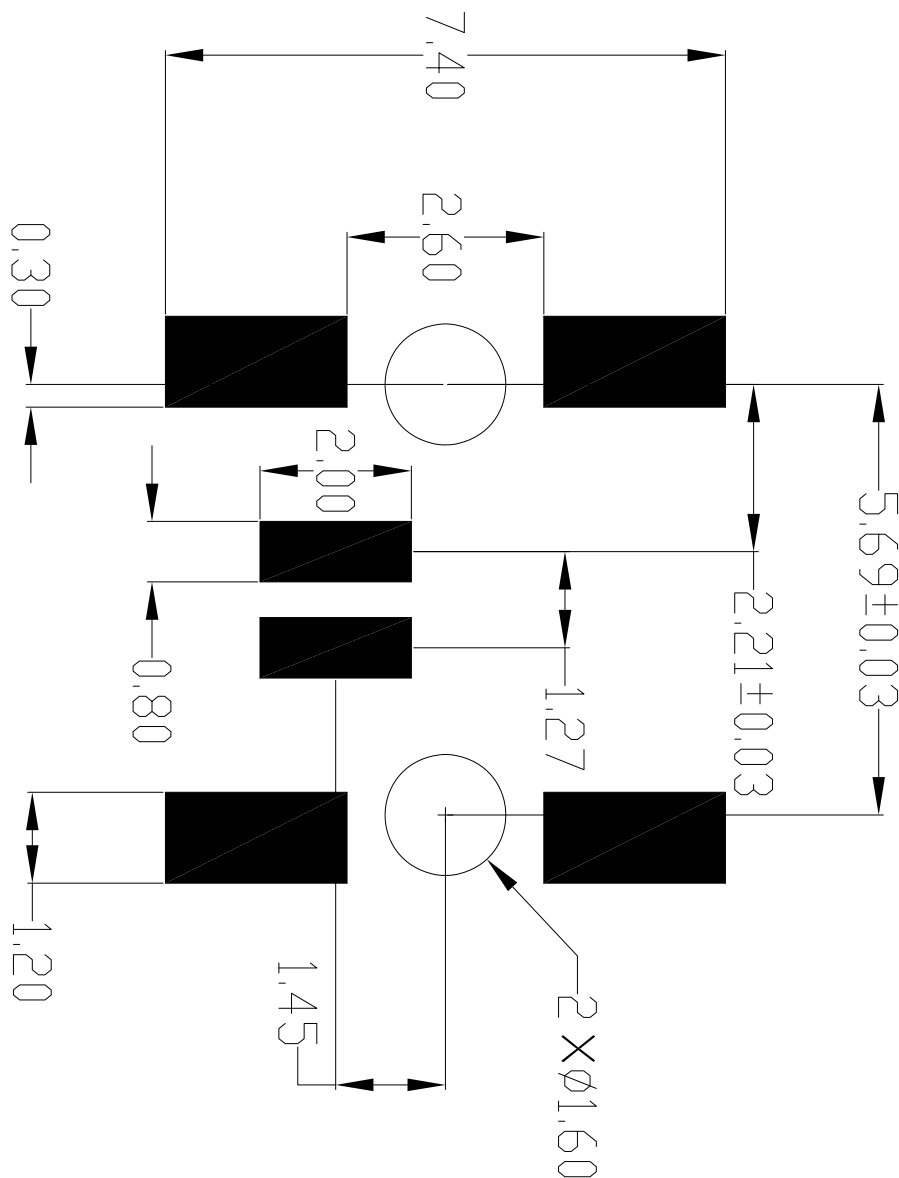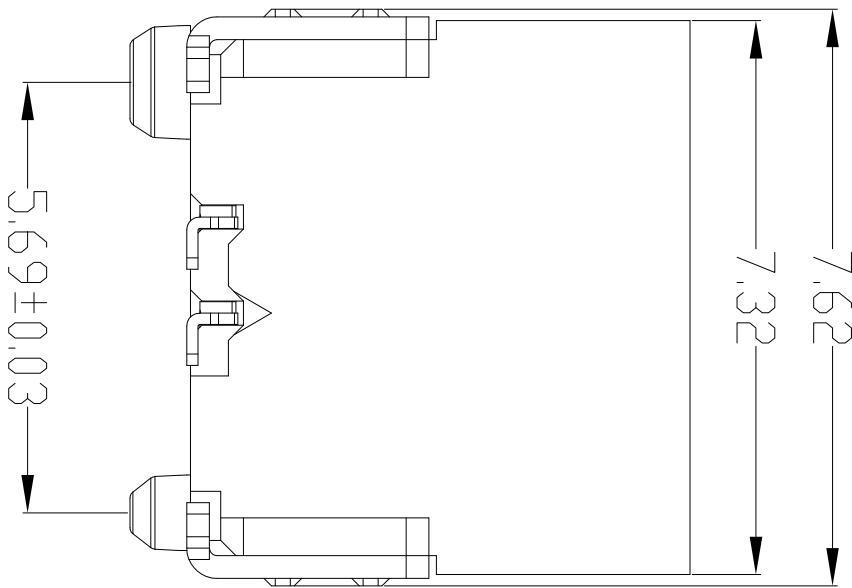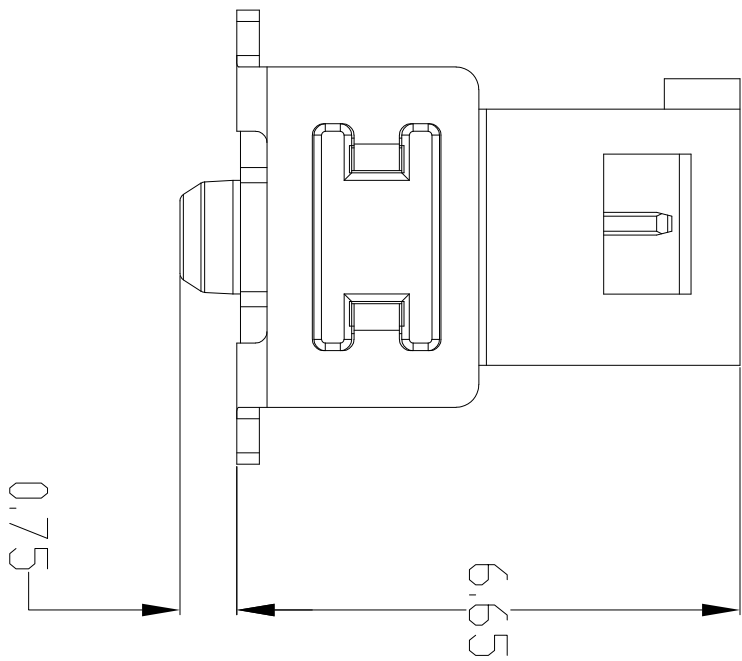

B

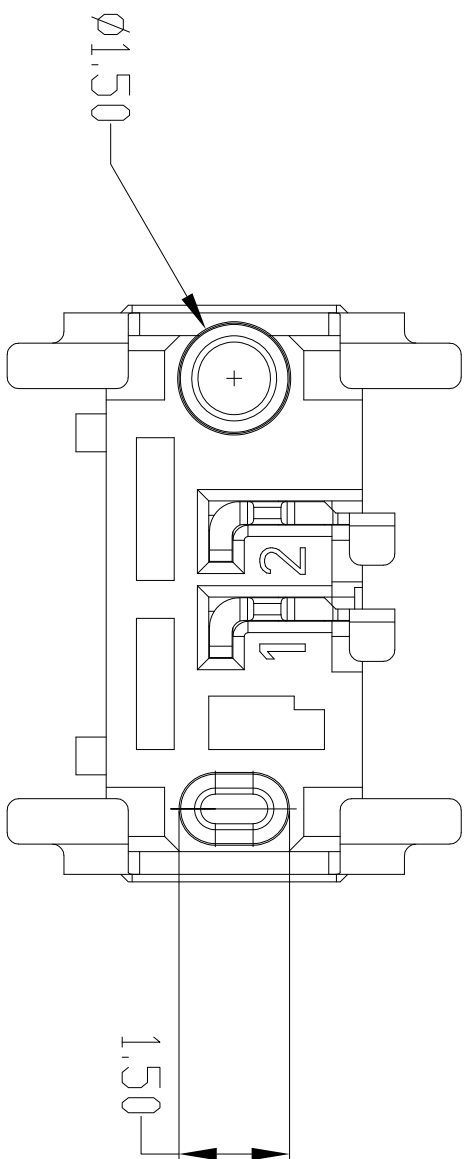

NOTES:

- THE PRODUCTS ARE ROHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC, UL94 V-0, BLACK COLOR.
CONTACT: COPPER ALLOY, MATING AREA GOLD PLATING, OTHER AREA TIN PLATING.

A

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION		NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS		MATERIAL SPEC. SEE NOTES 2		APPROVALS		DATE		上海良速电子有限公司	
TOLERANCES: ANGLES: ±2°		SEE NOTES 2		PREPARED BY JUSTIN LI		Jun-30-20		Powerlite	
DEFAULT LINEAR TOLERANCES SEE TABLE		PROCESS SPEC.		ENGINEER IN CHARGE TYLER QIU		Jun-30-20		1.27mm Single Row 2pin V Male SMT Connector	
DIM. & TOL. PER ASME Y14.5M-1994; DRW PER MIL-DTL-31000;		--		DESIGN MANAGER TYLER QIU		THIRD ANGLE PROJECTION		U	
LEGENDS: -FLAG NOTE CALL OUT		--		DESIGN ACTIVITY GROUP		SIZE C		PL-MW02101	
REFERENCE ONLY		--		THIRD ANGLE PROJECTION		DOCUMENT NO		REV A	
						SCALE:		SHEET 1 OF 1	

A

3

2

1

4