


4

3




2

GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

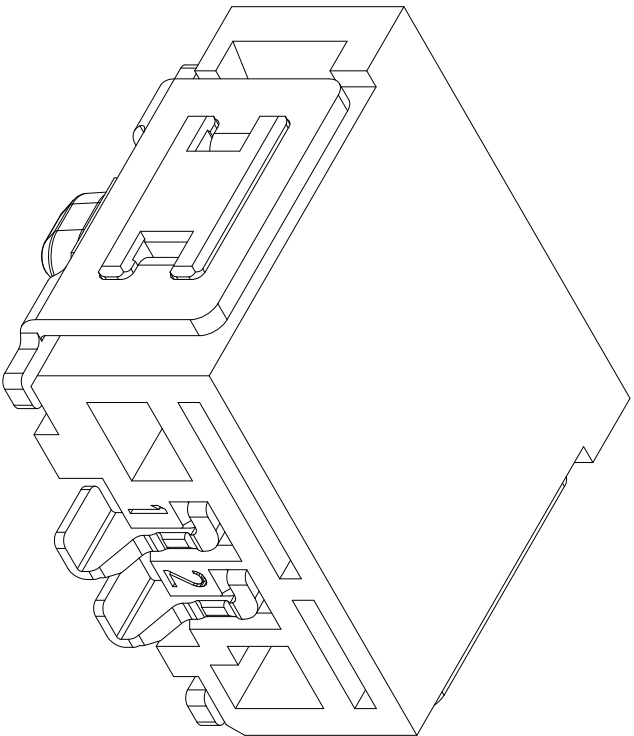


CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-06-30
B	Drawing templet update	2021-07-30

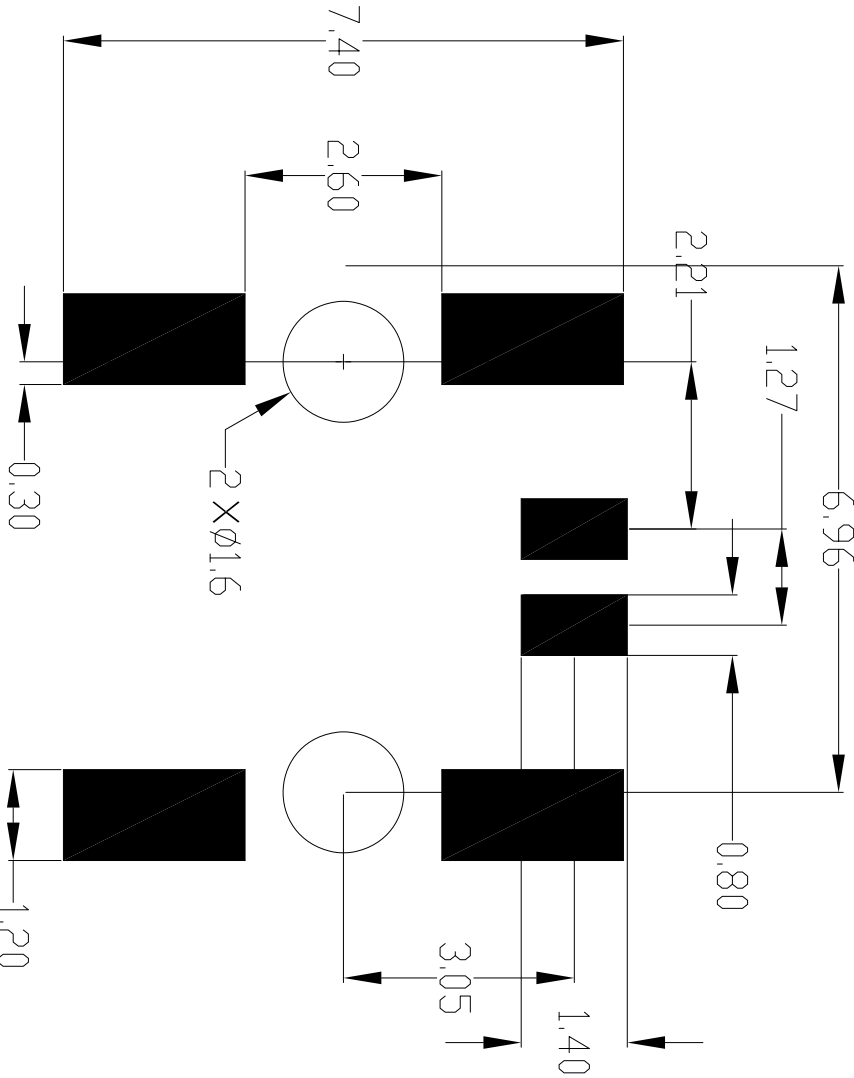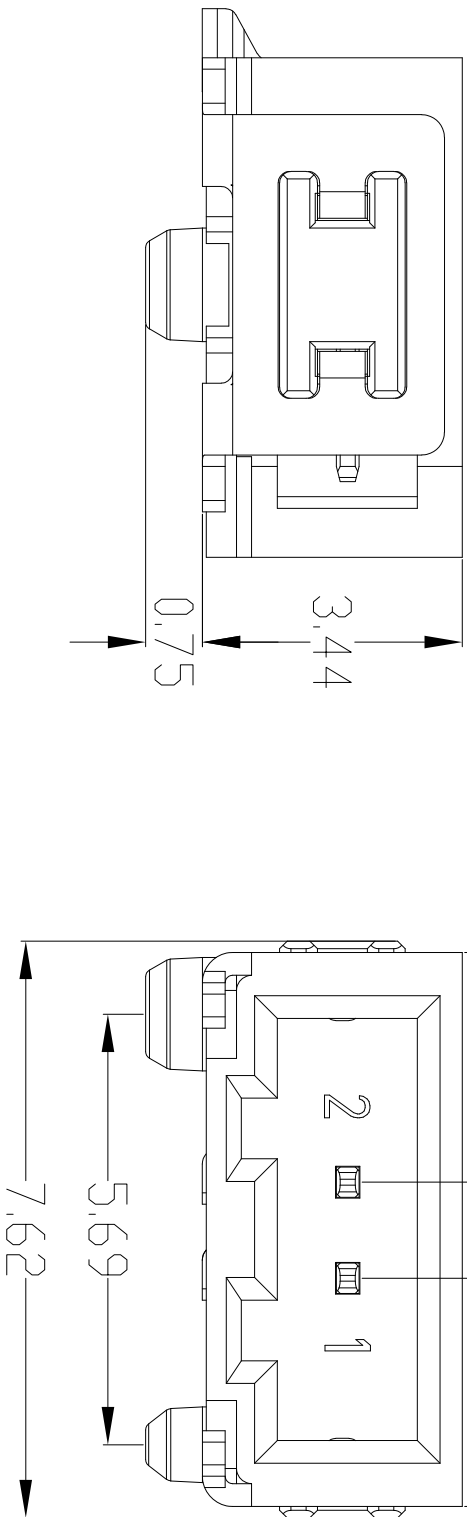
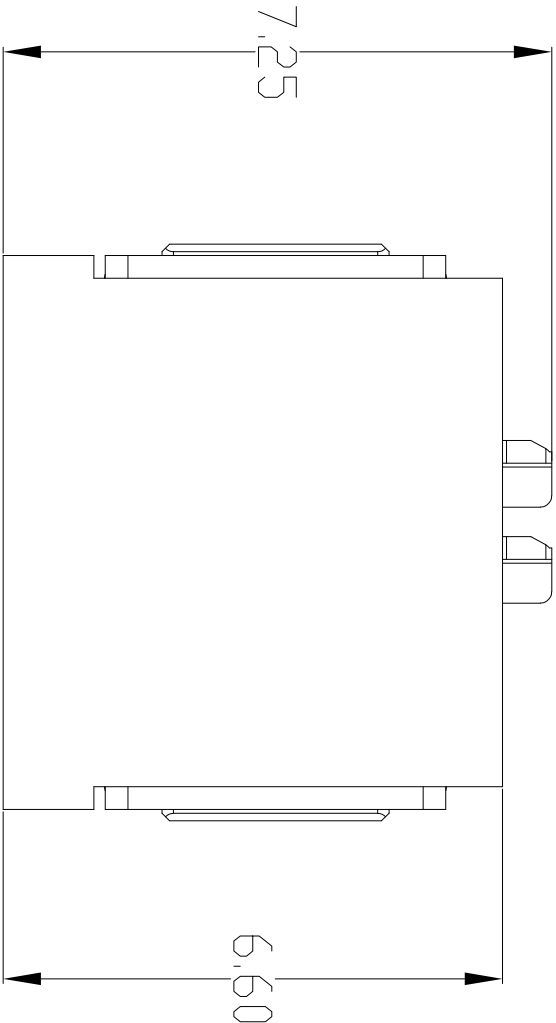


RECOMMENDED PCB-LAYOUT

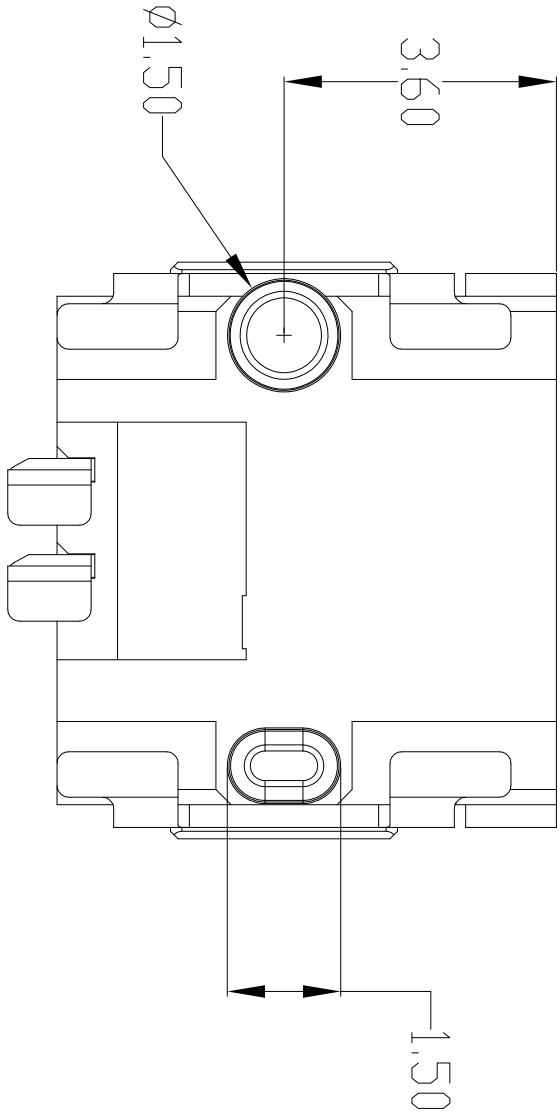

NOTES:

- THE PRODUCTS ARE ROHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC, UL94 V-0, BLACK COLOR.
CONTACT: COPPER ALLOY, MATING AREA GOLD PLATING, OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	-	PART NUMBER	DESCRIPTION		NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRW PER MIL-DTL-31000; LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY				MATERIAL SPEC.		上海良速电子有限公司 Powerlite 1.27mm Single Row 2pin RA Male SMT Connector U				
				SEE NOTES 2						
				PROCESS SPEC.						
				--						
				THIRD ANGLE PROJECTION						
APPROVALS PREPARED BY JUSTIN LI ENGINEER IN CHARGE TYLER QIU DESIGN MANAGER TYLER QIU DESIGN ACTIVITY GROUP DATE JUL 30 2021										
  SIZE C DOCUMENT NO PL-MA02101 REV B SCALE: REF. SHEET 1 OF 1										