
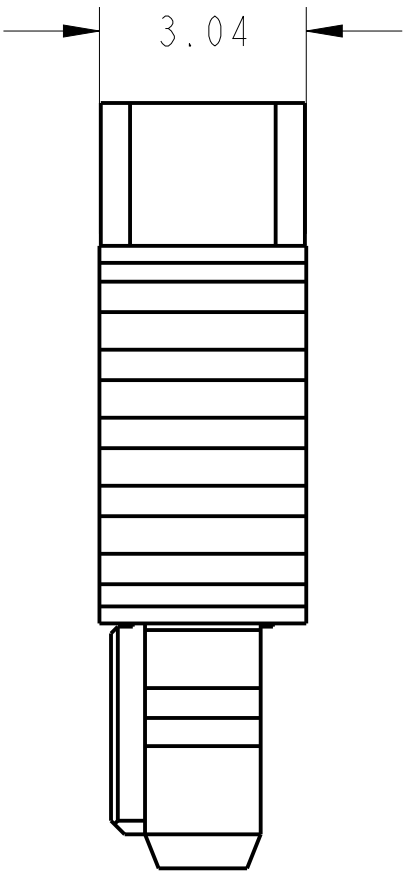
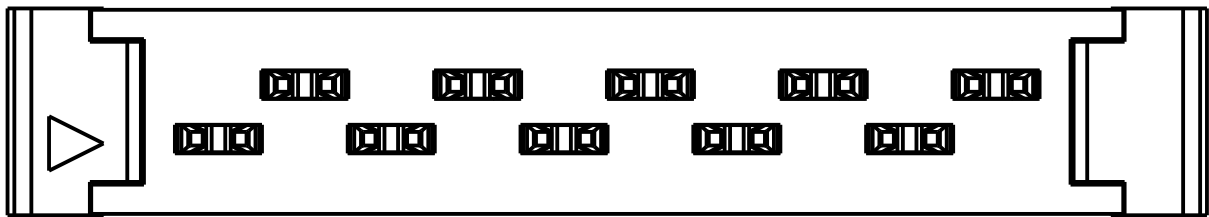



GENERAL TOLERANCE						SURFACE FINISH
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	
						1.6

CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-07-13

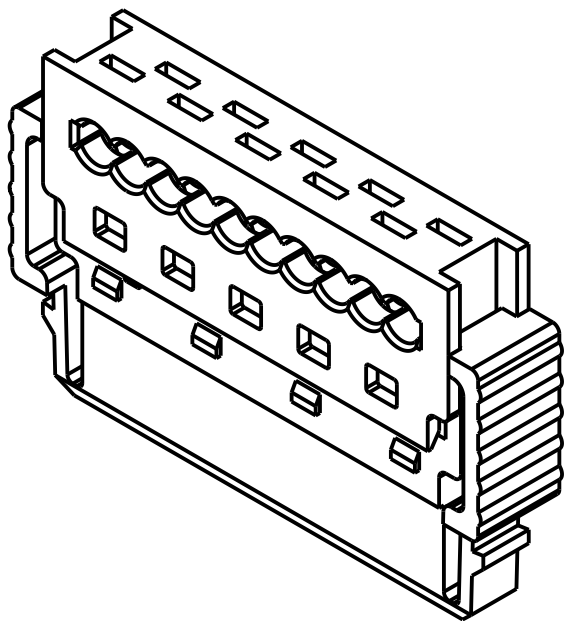


PRE-ASSEMBLY
WHILE SHIPPING

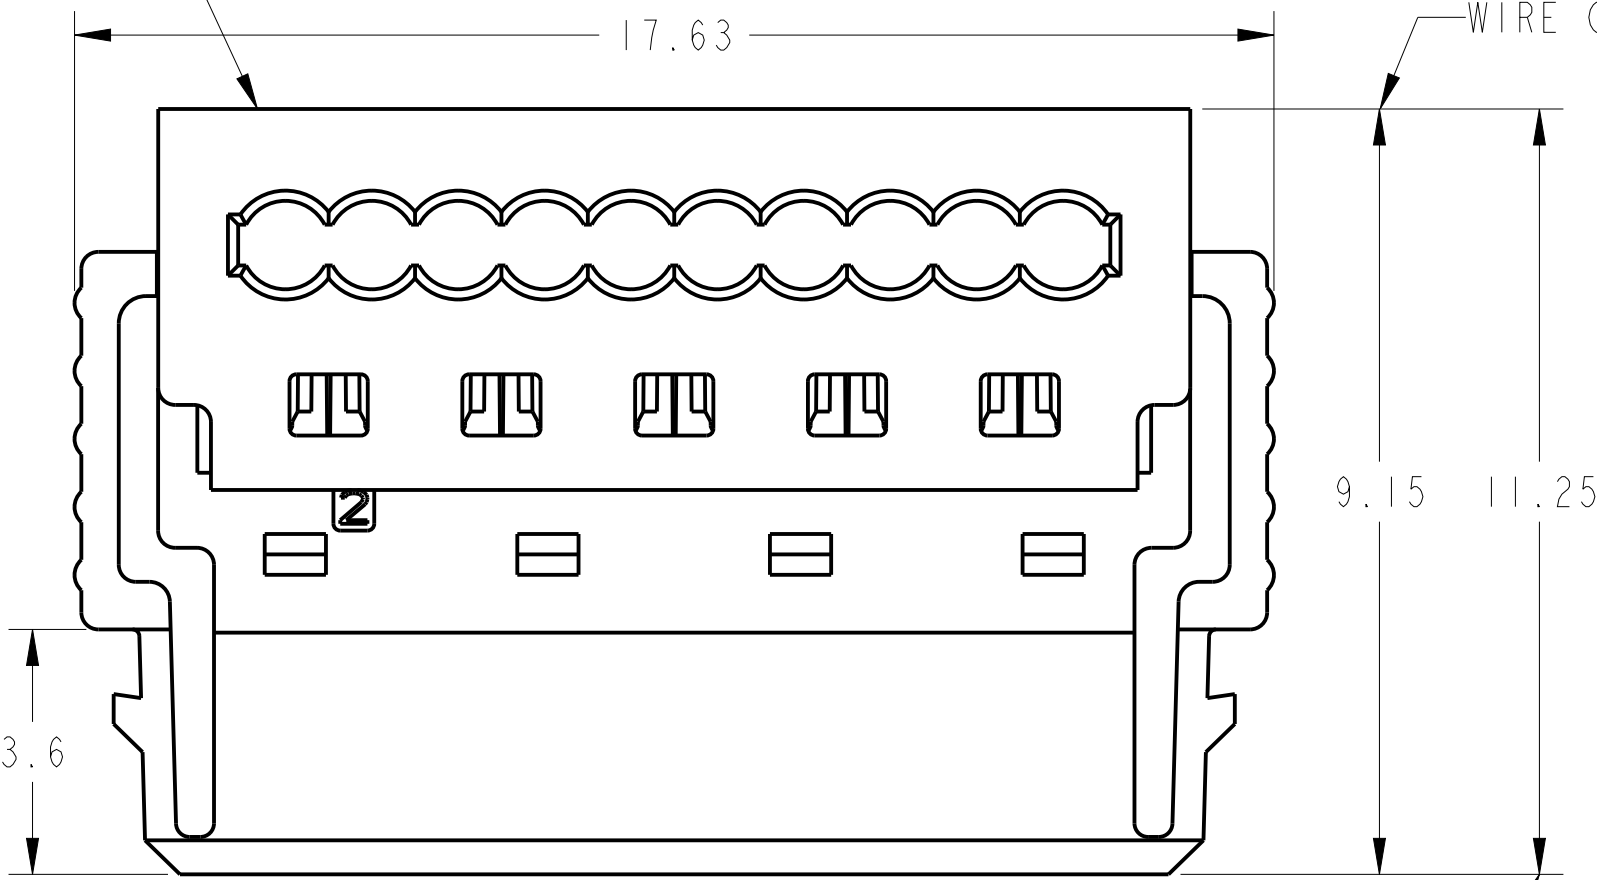


WIRE GUIDE PRESSED ON

WIRE GUIDE LOSSE MOUNTED (AT TIME OF SUPPLY)

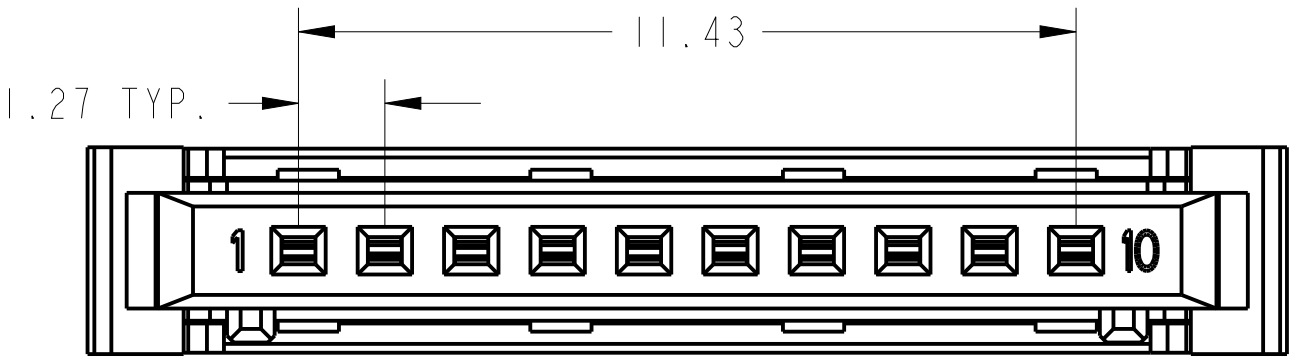

- NOTES:
- 1. THE PRODUCTS ARE RoHS COMPLIANCE.
 - 2. MATERIAL SPEC:
HOUSING: PA4TTHREMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT:COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION	NOTE			
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES= ±2° DEFAULT LINEAR TOLERANCES SEE TABLE ----- DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; LEGENDS:  =FLAG NOTE CALL OUT REFERENCE ONLY		MATERIAL SPEC.	SEE NOTES 2	APPROVALS		DATE	上海良速电子有限公司				
		PROCESS SPEC.	--	PREPARED BY	JUSTIN LI	Jul-14-20			Powerlite		
				ENGINEER IN CHARGE	TYLER QIU						
				DESIGN MANAGER	TYLER QIU						
				DESIGN ACTIVITY GROUP				1.27mm Single Row 10pin Female 90 ° cable outlet			
				THIRD ANGLE PROJECTION						PL-FA10101	
											
				SIZE	DOCUMENT NO.	REF.	REV.				
				C			A				
				SCALE: 9.0			SHEET 1 OF 1				