
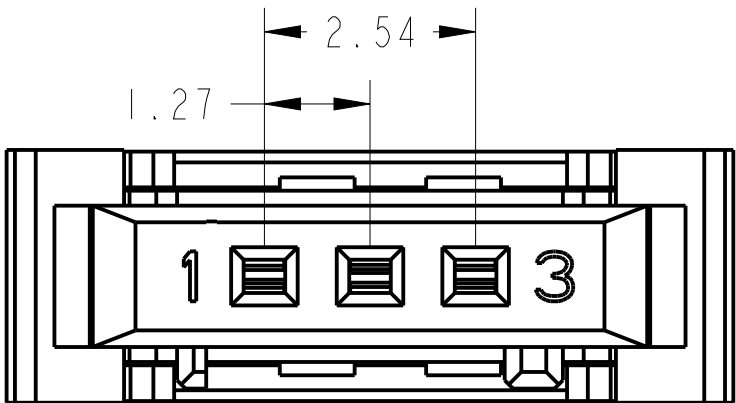
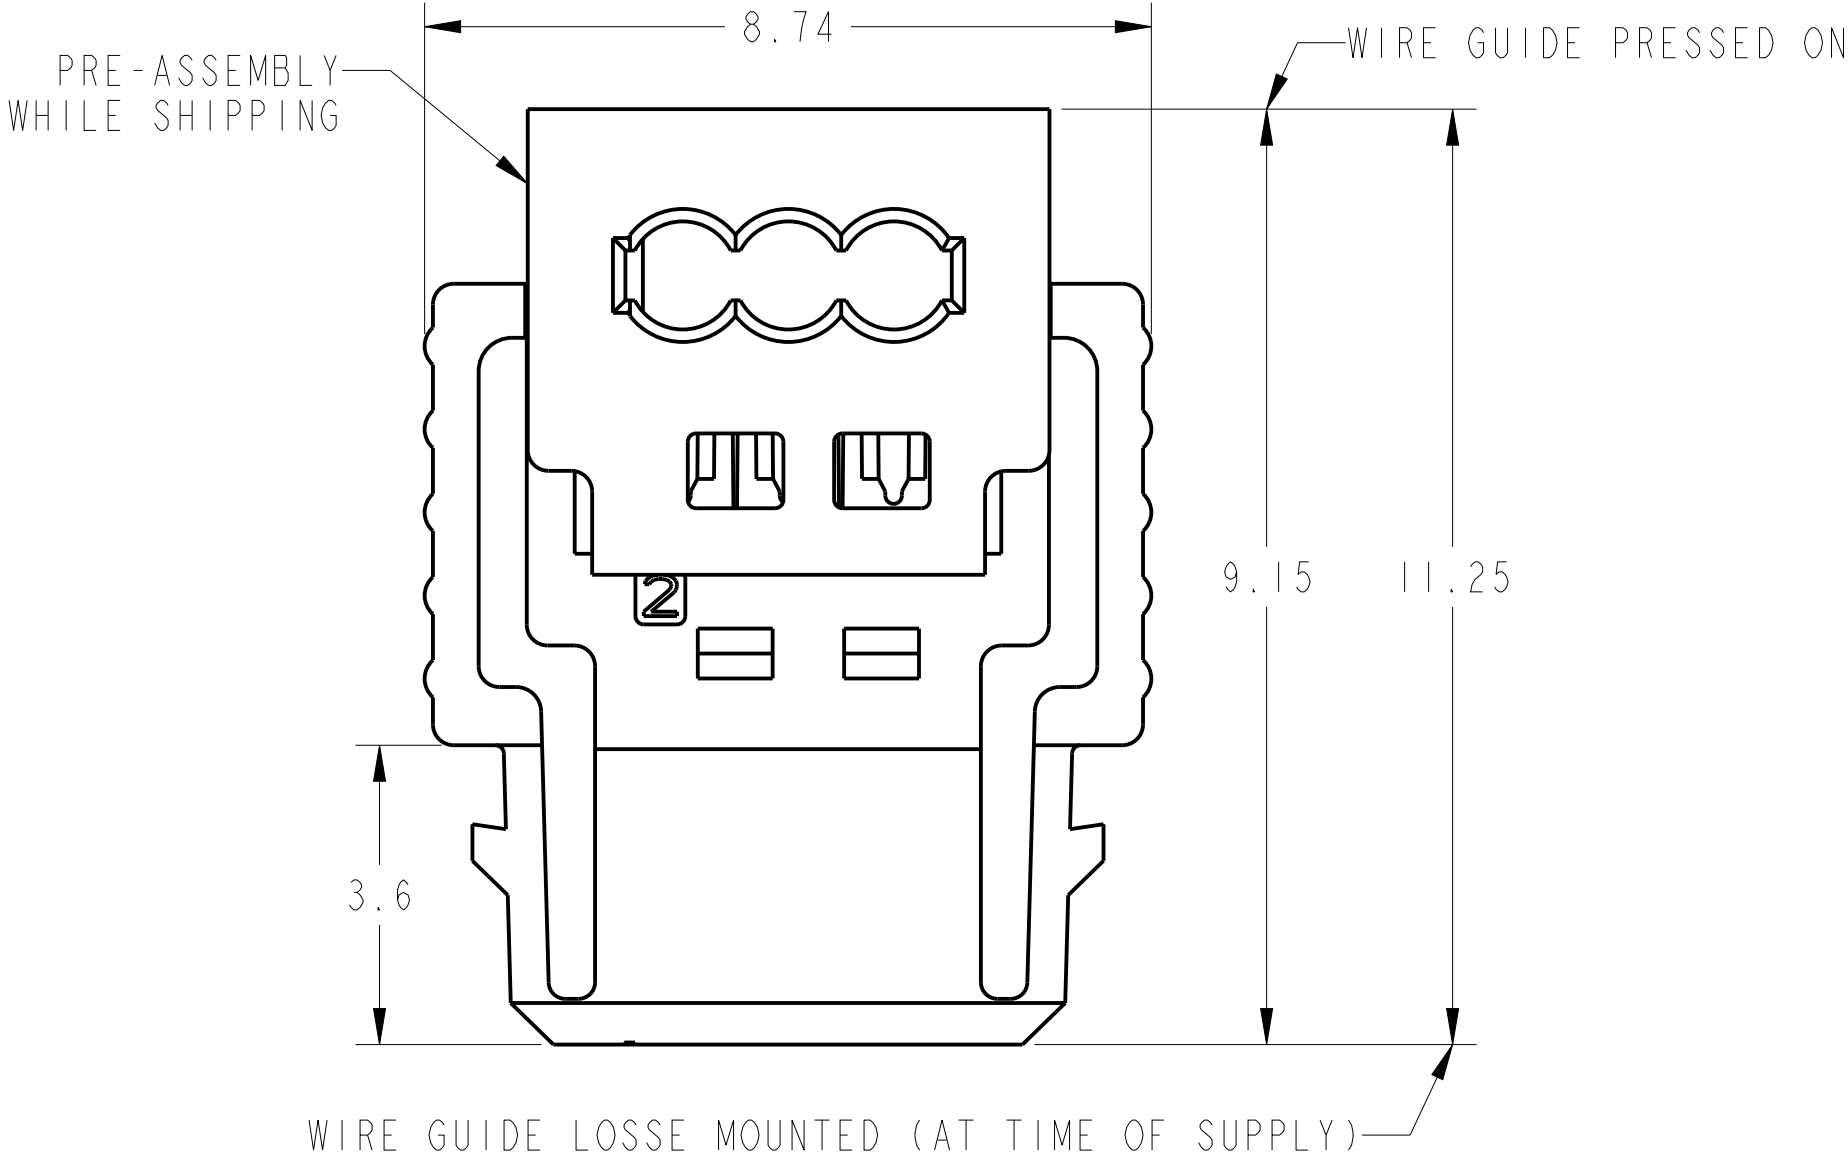
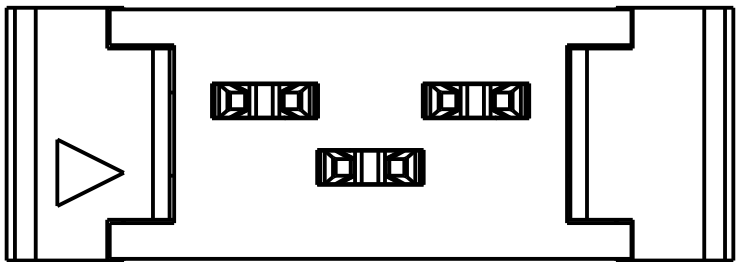


GENERAL TOLERANCE						SURFACE FINISH
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	
						1.6


CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-07-13

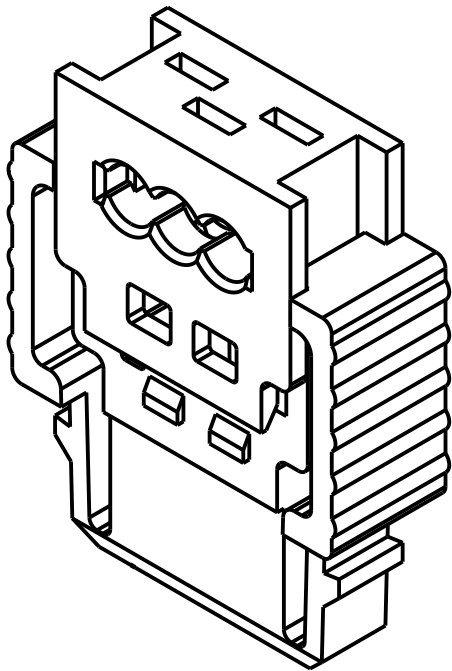

NOTES:

- THE PRODUCTS ARE RoHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING:PA4TTHREMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT:COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION		NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES= $\pm 2^{\circ}$ DEFAULT LINEAR TOLERANCES SEE TABLE ----- DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; LEGENDS:  =FLAG NOTE CALL OUT REFERENCE ONLY		MATERIAL SPEC.	APPROVALS	DATE	上海良速电子有限公司 Powerlite 1.27mm Single Row 3pin Female 90° cable outlet				
		SEE NOTES 2	PREPARED BY JUSTIN LI	Jul-13-20					
			ENGINEER IN CHARGE TYLER QIU						
			DESIGN MANAGER TYLER QIU						
		PROCESS SPEC.	THIRD ANGLE PROJECTION	SIZE	DOCUMENT NO.	PL-FA03101		REV.	
				C				A	
					SCALE: 1:1.0		REF.		SHEET 1 OF 1