





GENERAL TOLERANCE						SURFACE FINISH
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	

CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-07-13

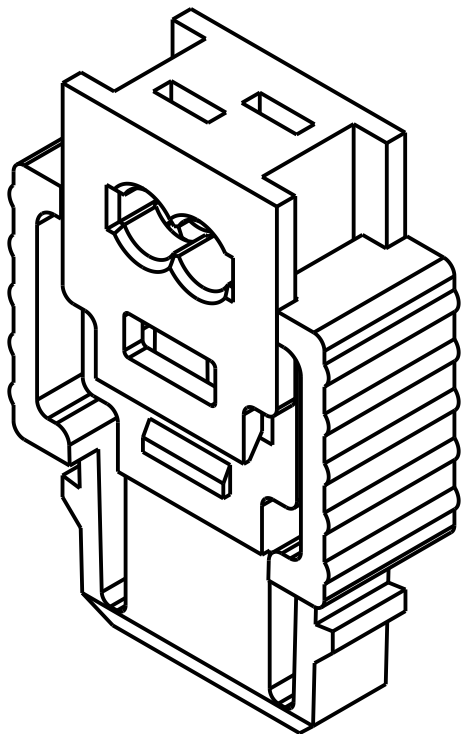

PRE-ASSEMBLY
WHILE SHIPPING

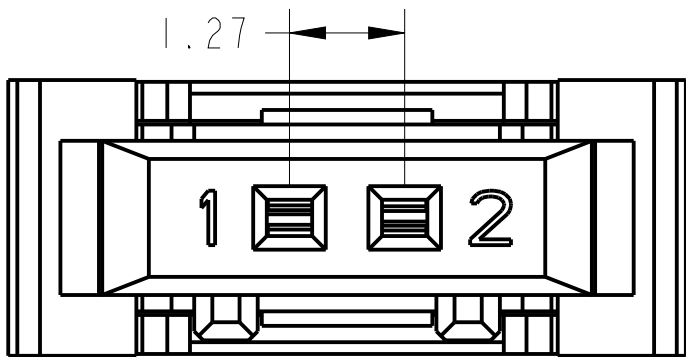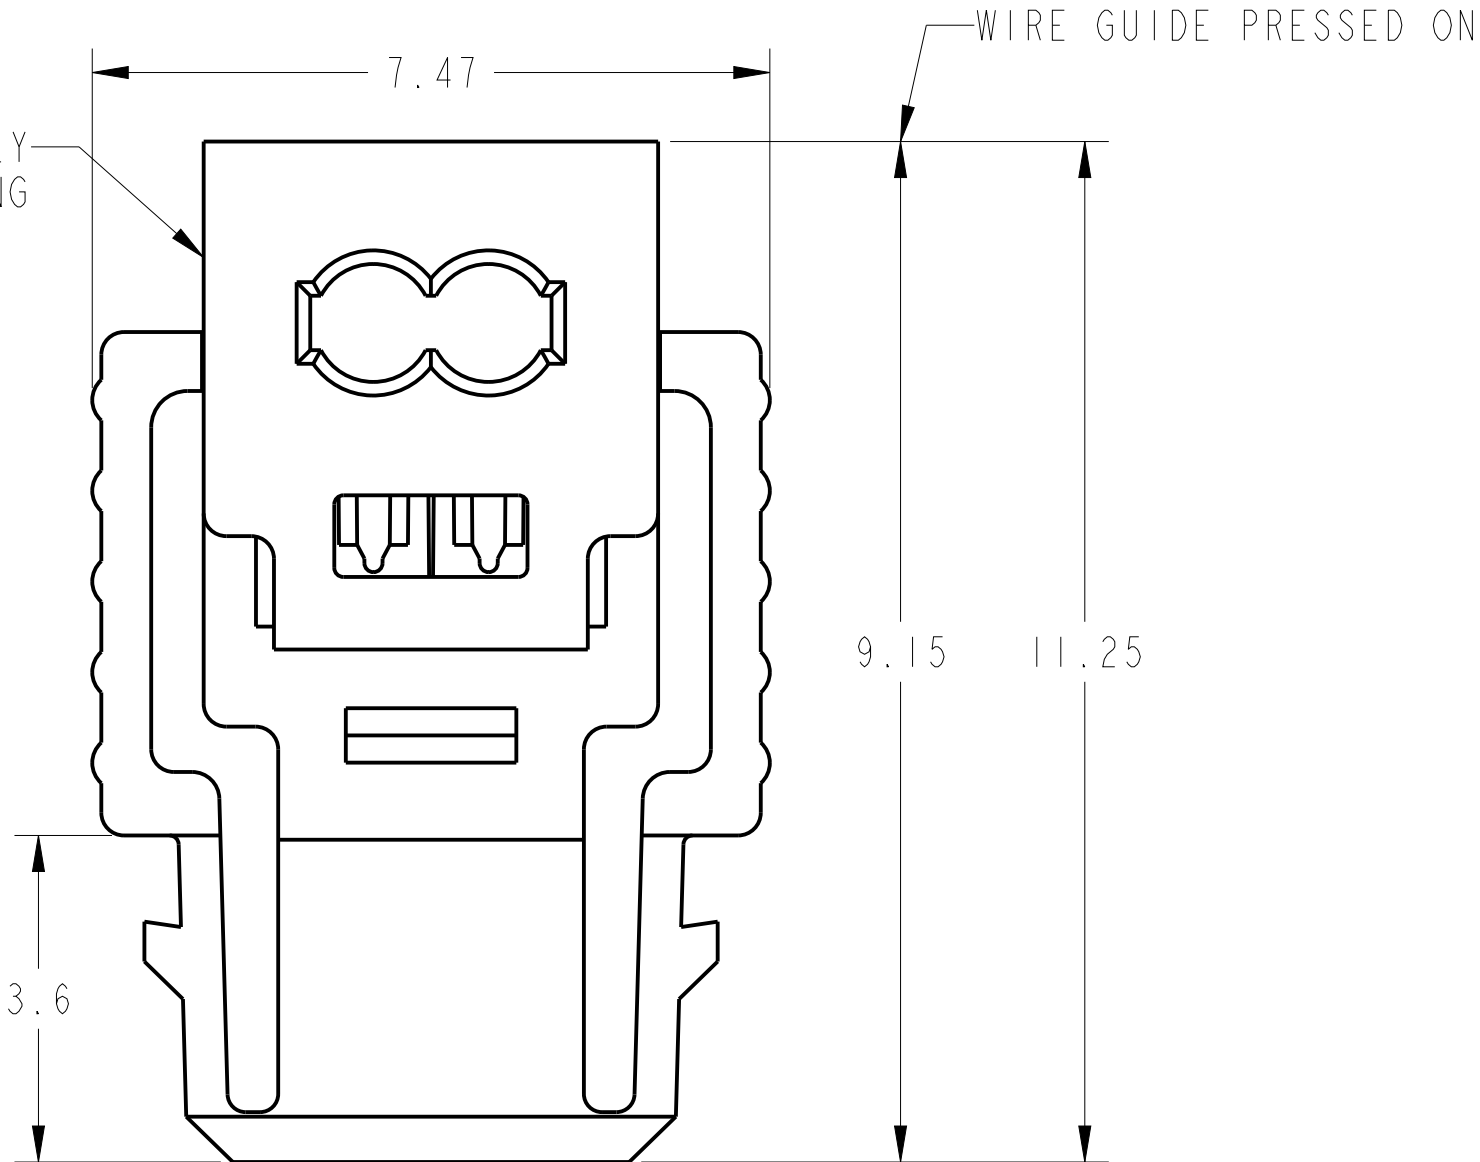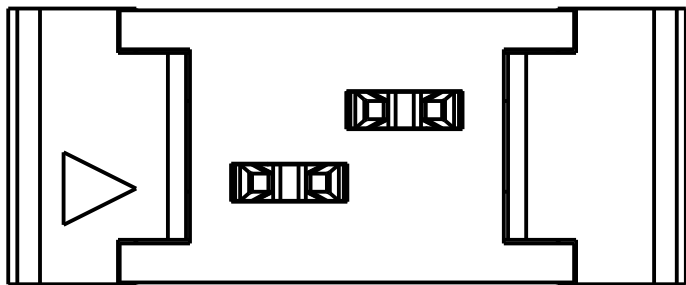

NOTES:

- THE PRODUCTS ARE RoHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING:PA4TTHREMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT:COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION	NOTE	
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES= ±2° DEFAULT LINEAR TOLERANCES SEE TABLE ----- DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; LEGENDS: △ =FLAG NOTE CALL OUT REFERENCE ONLY		MATERIAL SPEC.	SEE NOTES 2	APPROVALS	DATE	上海良速电子有限公司 Powerlite 1.27mm Single Row 2pin Female 90° cable outlet			
		PROCESS SPEC.	---	PREPARED BY	JUSTIN LI				Jul-13-20
				ENGINEER IN CHARGE	TYLER QIU				
				DESIGN MANAGER	TYLER QIU				
				DESIGN ACTIVITY GROUP					
				THIRD ANGLE PROJECTION		SIZE	DOCUMENT NO.	PL-FA02101	REV.
				C			A		
						SCALE: 12.0	REF.	SHEET 1 OF 1	