

4






3

2


GENERAL TOLERANCE							
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

CUSTOMER DRAWING

REVISIONS			
REV	DESCRIPTION	DATE	

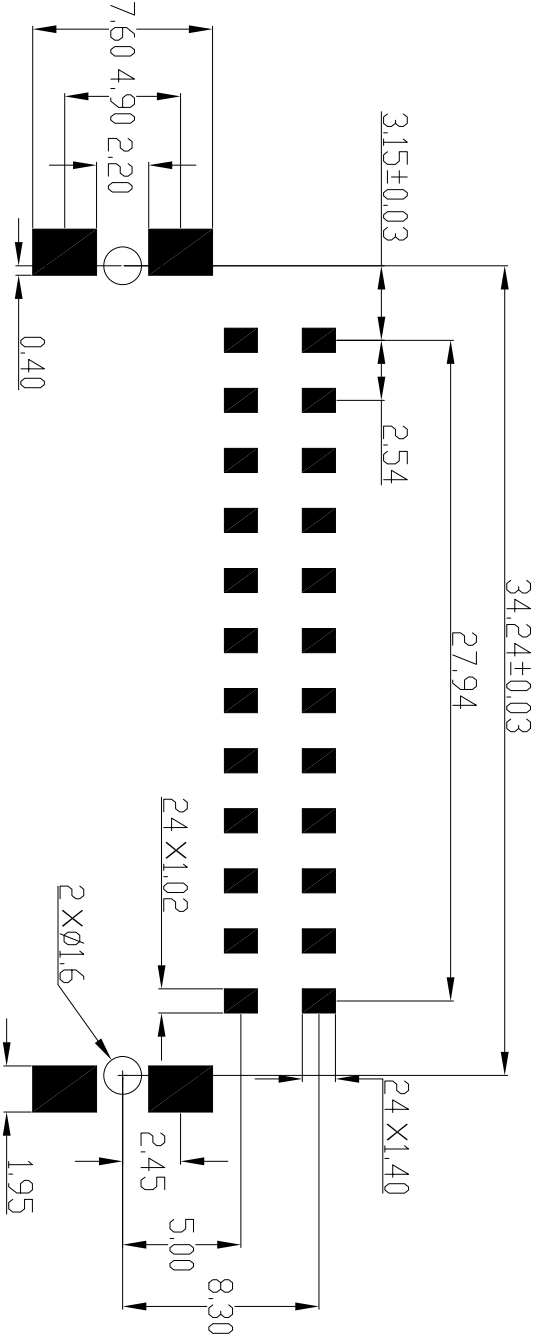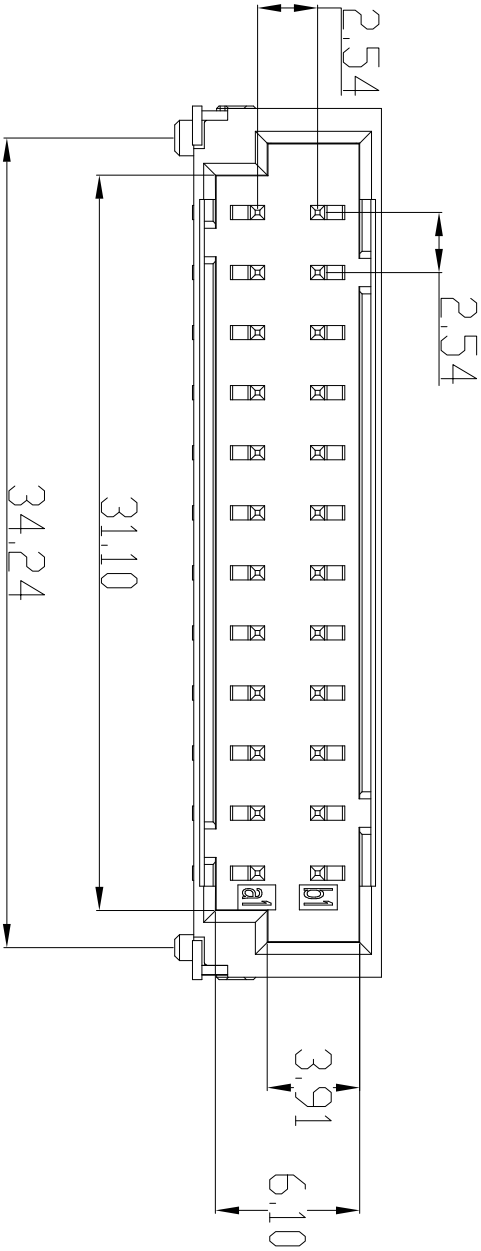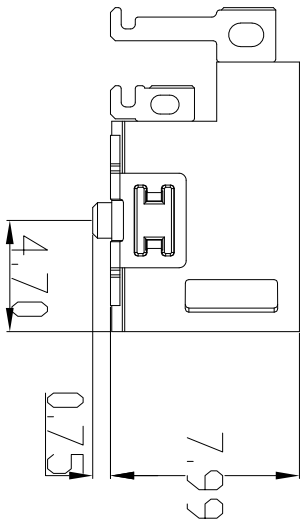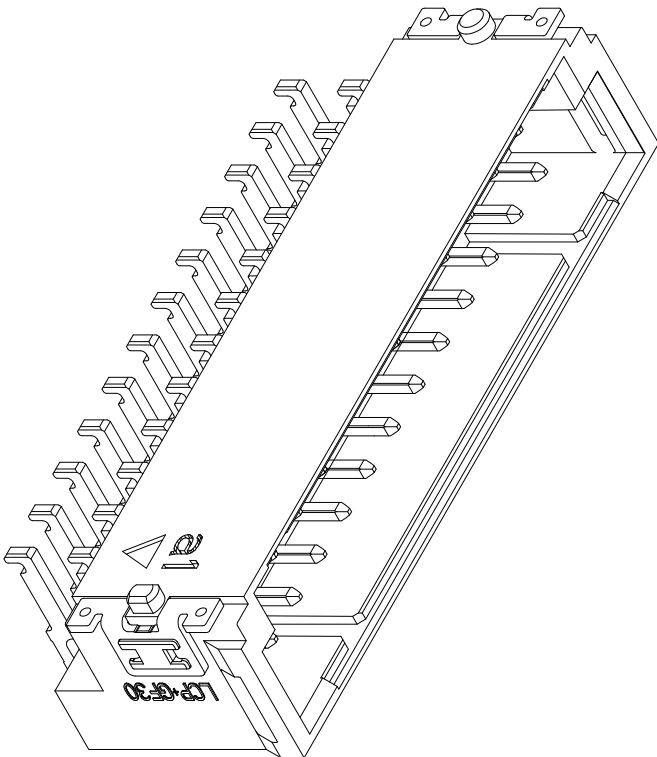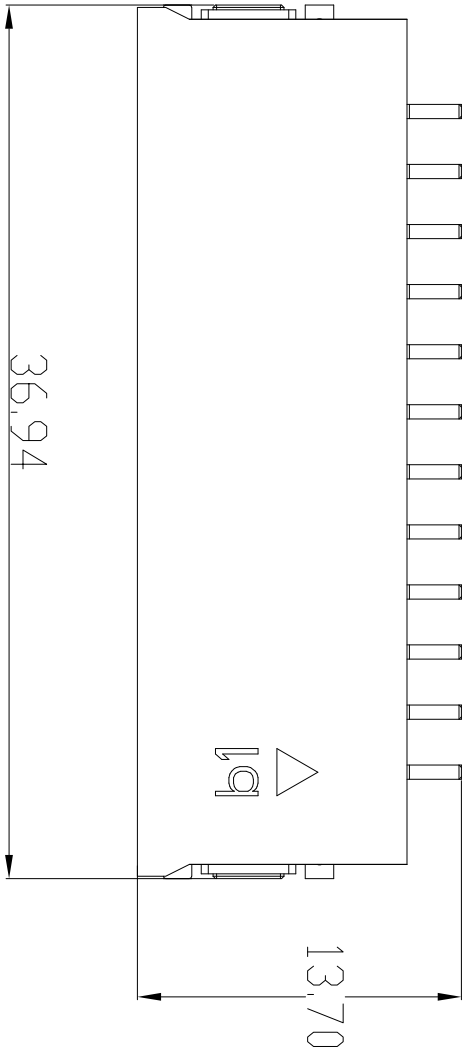

RECOMMENDED PCB-LAYOUT

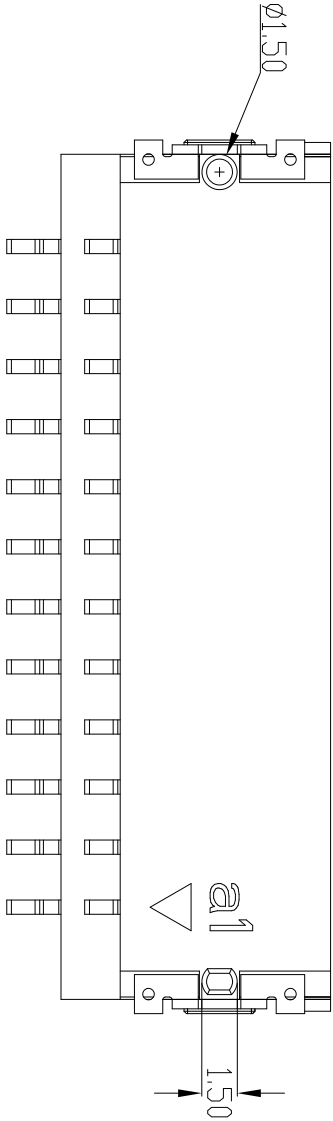

- NOTES:
- THE PRODUCTS ARE ROHS COMPLIANCE.
 - MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT: COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.
 - COPLANARITY AREA OF TERMINATION ≤0.1mm.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION	NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES- ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DPM PER MIL-DTL-31000; LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY		MATERIAL SPEC.		上海良速电子有限公司 Powermax 24pin dual row RA male SMT connector U				
		SEE NOTES 2						
		PROCESS SPEC.						
		--						
		THIRD ANGLE PROJECTION						
		APPROVALS		DATE				
PREPARED BY		JUSTIN LI		2020/5/6				
ENGINEER IN CHARGE		TYLER QIU						
DESIGN MANAGER		TYLER QIU						
DESIGN ACTIVITY GROUP								
SCALE:		SIZE		DOCUMENT NO.		REF.		SHEET 1 OF 1
C		PM-MA24201		A				