

4

3

2




GENERAL TOLERANCE

DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

CUSTOMER DRAWING



REVISIONS

REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-06-30

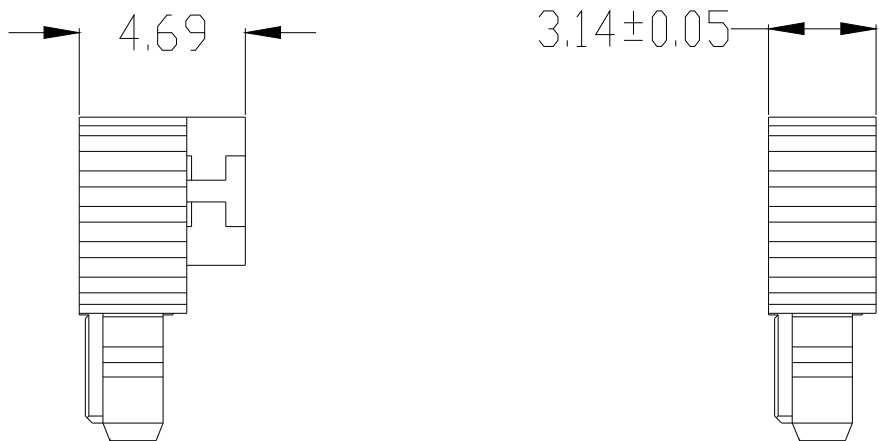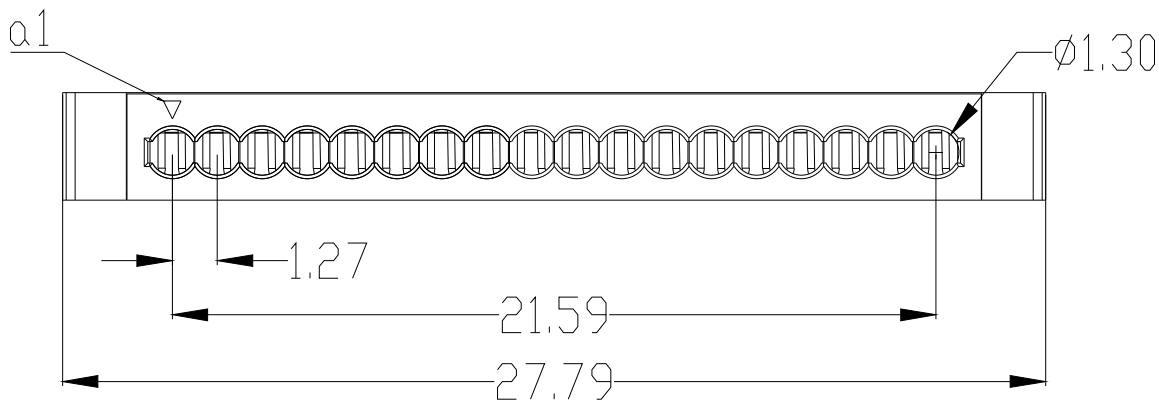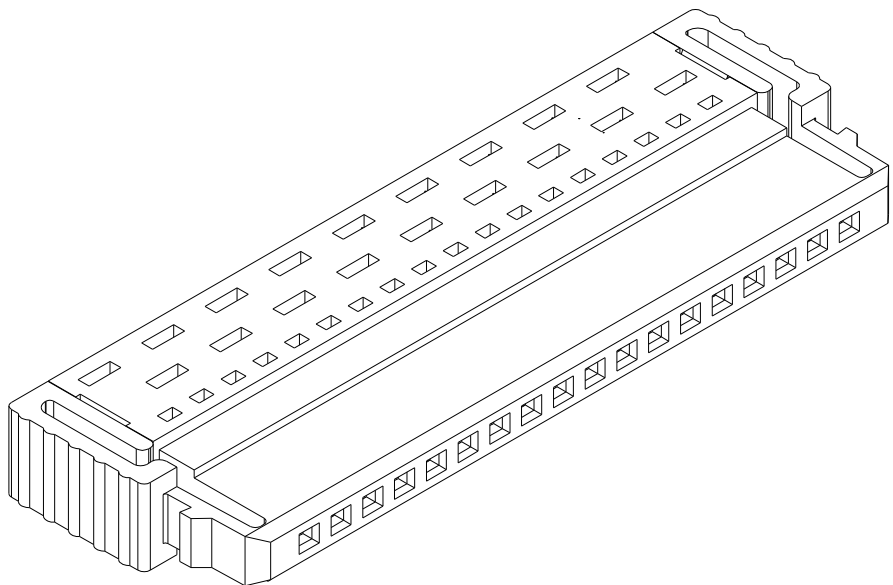


PRE-ASSEMBLY
WHILE SHIPPING

WIRE GUIDE PRESSED ON

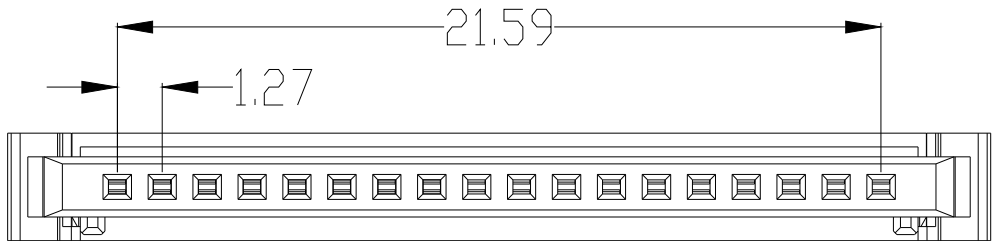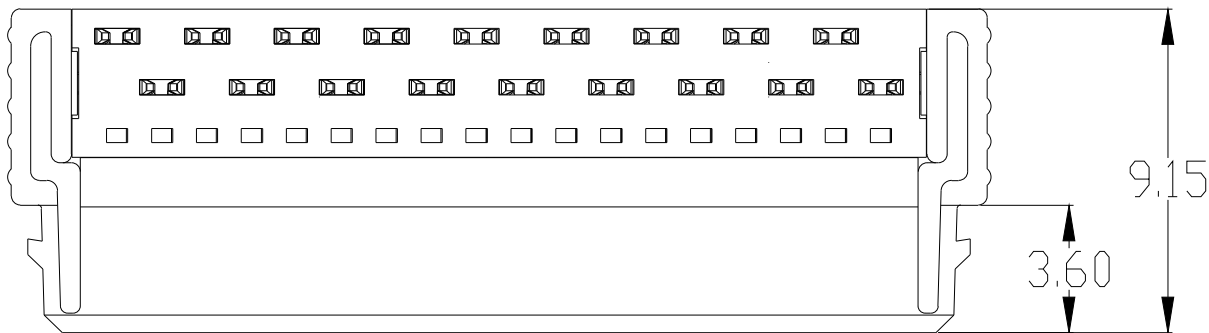

NOTES:

- THE PRODUCTS ARE RoHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING:PA4T-GF30TREMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT:COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED	SPECIFICATIONS	POS	QTY	PART NUMBER	DESCRIPTION	NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES= ±2° DEFAULT LINEAR TOLERANCES SEE TABLE ----- DIM.& TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; LEGENDS:  =FLAG NOTE CALL OUT REFERENCE ONLY	MATERIAL SPEC. SEE NOTES 2	APPROVALS		DATE	上海良速电子有限公司 Powerlite 1.27mm Single Row 18pin Female 180°C cable outlet	
	PROCESS SPEC. --	PREPARED BY	JUSTIN LI	Jun-30-20		
		ENGINEER IN CHARGE	TYLER QIU			
		DESIGN MANAGER	TYLER QIU			
		DESIGN ACTIVITY GROUP				
THIRD ANGLE PROJECTION				SIZE C	DOCUMENT NO. PL-FS18101	REV. A
				SCALE:	REF.	SHEET 1 OF 1