

4

3

2





GENERAL TOLERANCE


DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

CUSTOMER DRAWING

REVISIONS

REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-06-30

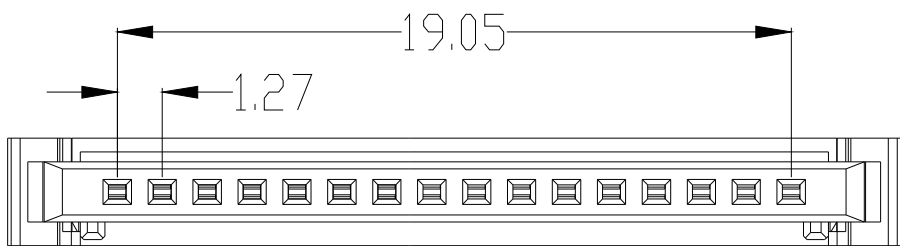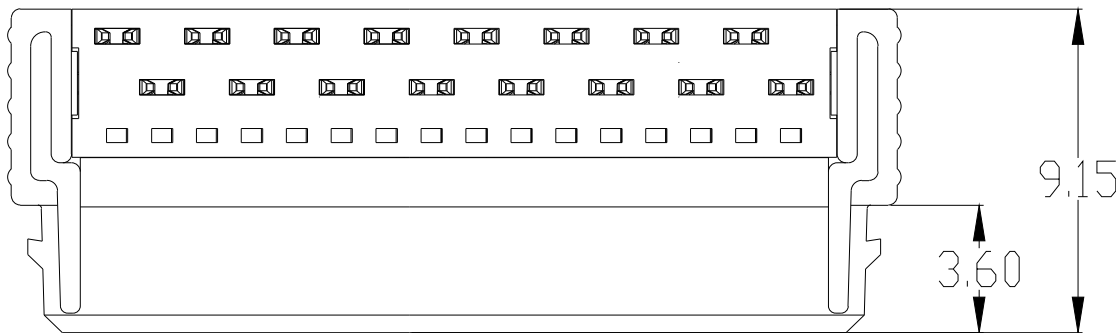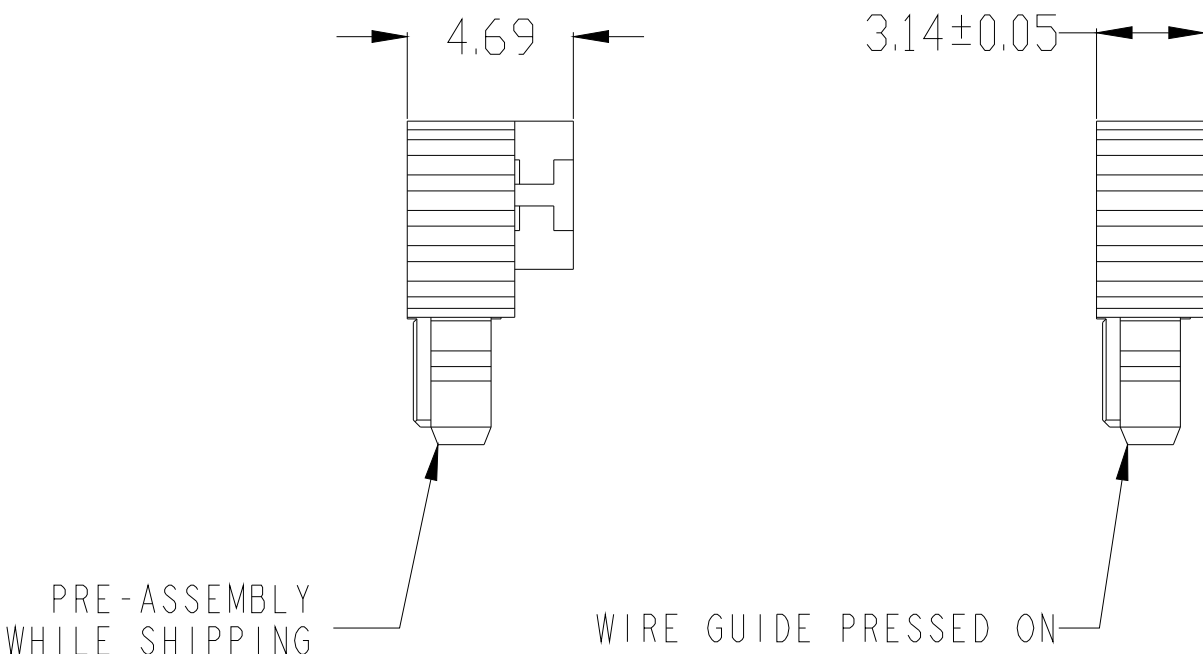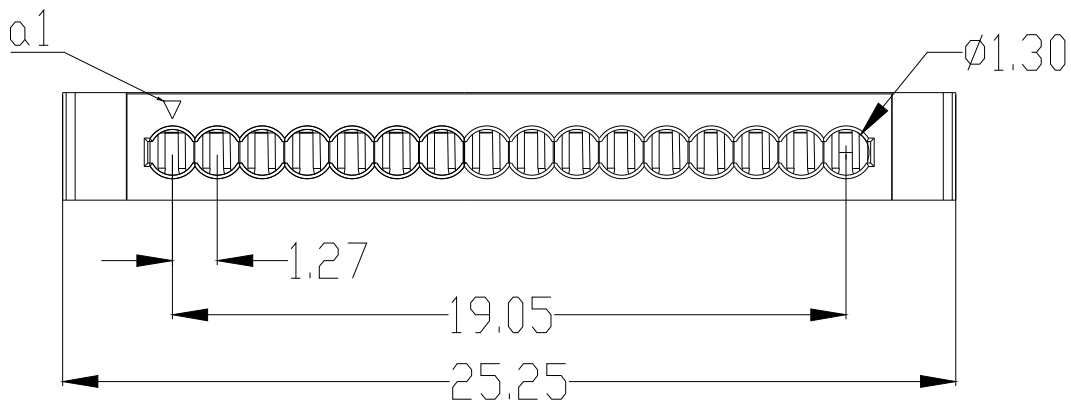

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION		NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES= ±2° DEFAULT LINEAR TOLERANCES SEE TABLE ----- DIM.& TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; LEGENDS:  =FLAG NOTE CALL OUT REFERENCE ONLY	MATERIAL SPEC.	APPROVALS		DATE		上海良速电子有限公司 Powerlite 1.27mm Single Row 16pin Female 180°C cable outlet			
	SEE NOTES 2	PREPARED BY	JUSTIN LI		Jun-30-20				
		ENGINEER IN CHARGE	TYLER QIU						
	PROCESS SPEC.	DESIGN MANAGER	TYLER QIU						
			DESIGN ACTIVITY GROUP						
		THIRD ANGLE PROJECTION							
									

- NOTES:
- THE PRODUCTS ARE RoHS COMPLIANCE.
 - MATERIAL SPEC:
HOUSING:PA4T-GF30THREMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT:COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.