

4



3

2


GENERAL TOLERANCE						SURFACE FINISH
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	

CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-06-30

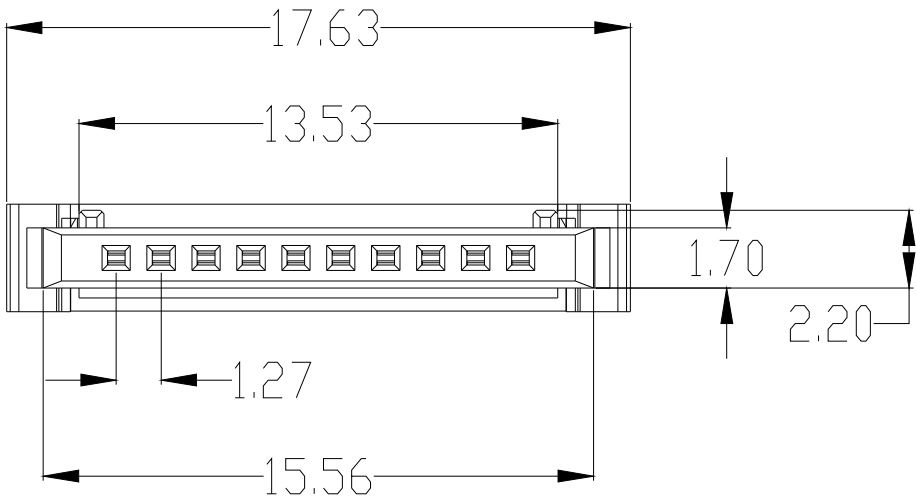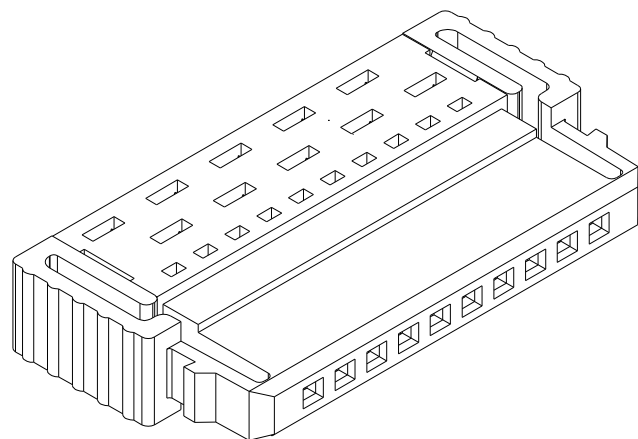



PRE-ASSEMBLY
WHILE SHIPPING

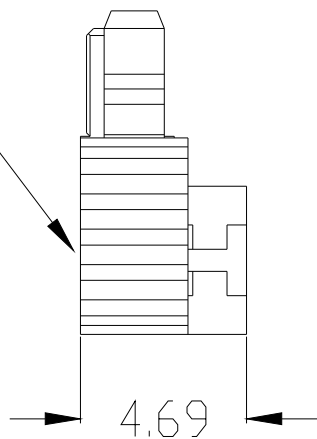

WIRE GUIDE PRESSED ON




3.14±0.05

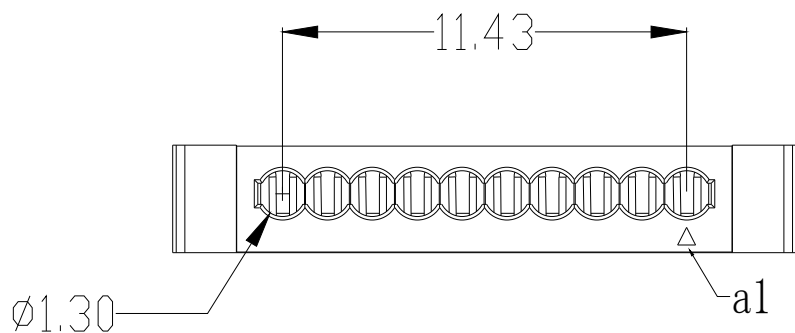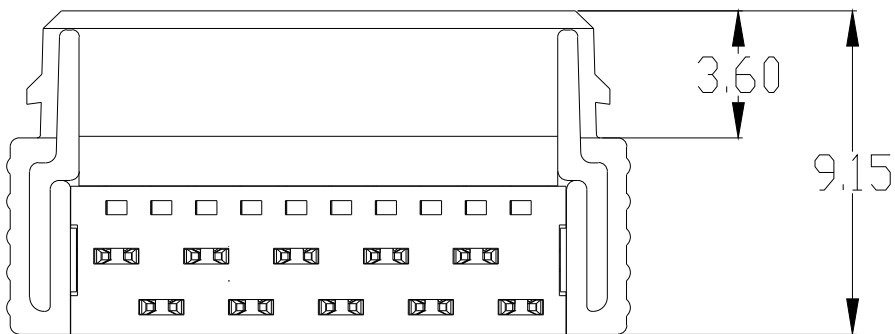

NOTES:

- THE PRODUCTS ARE RoHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING:PA4T-GF30THERMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT:COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS	POS	QTY	PART NUMBER	DESCRIPTION	NOTE		
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES= ±2° DEFAULT LINEAR TOLERANCES SEE TABLE ----- DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; LEGENDS: △ =FLAG NOTE CALL OUT REFERENCE ONLY		MATERIAL SPEC. SEE NOTES 2	APPROVALS		DATE	上海良速电子有限公司 Powerlite 1.27mm Single Row Female 180°C cable outlet			
			PREPARED BY JUSTIN LI		Jun-30-20				
			ENGINEER IN CHARGE TYLER QIU						
			DESIGN MANAGER TYLER QIU						
				PROCESS SPEC.	THIRD ANGLE PROJECTION		SIZE	DOCUMENT NO.	PL-FS10101
					C			A	
						SCALE:	REF.	SHEET 1 OF 1	