

4

3

2



GENERAL TOLERANCE

DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6


CUSTOMER DRAWING

REVISIONS




REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-06-30

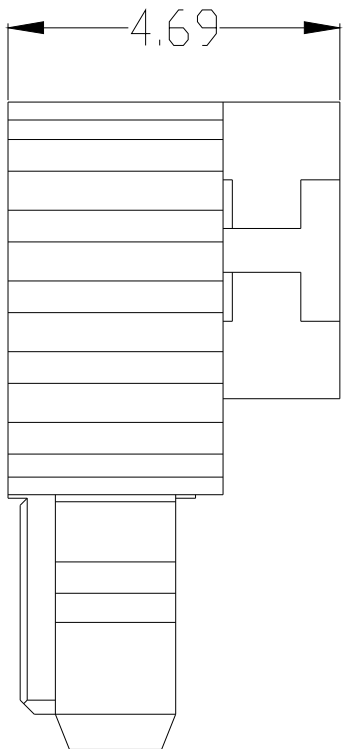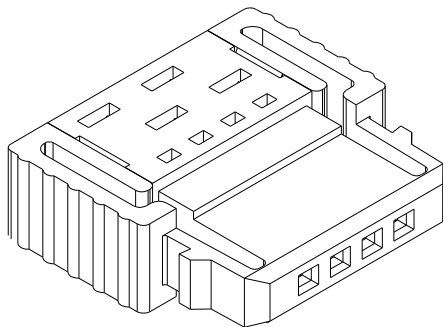

PRE-ASSEMBLY
WHILE SHIPPING

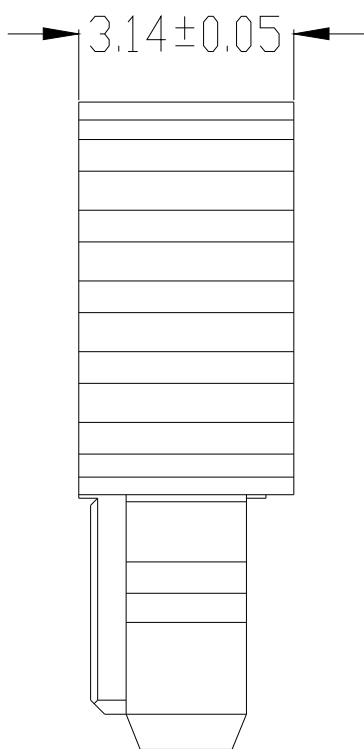


WIRE GUIDE PRESSED ON

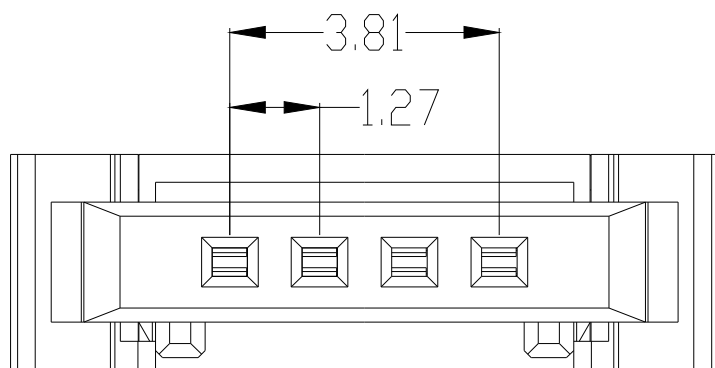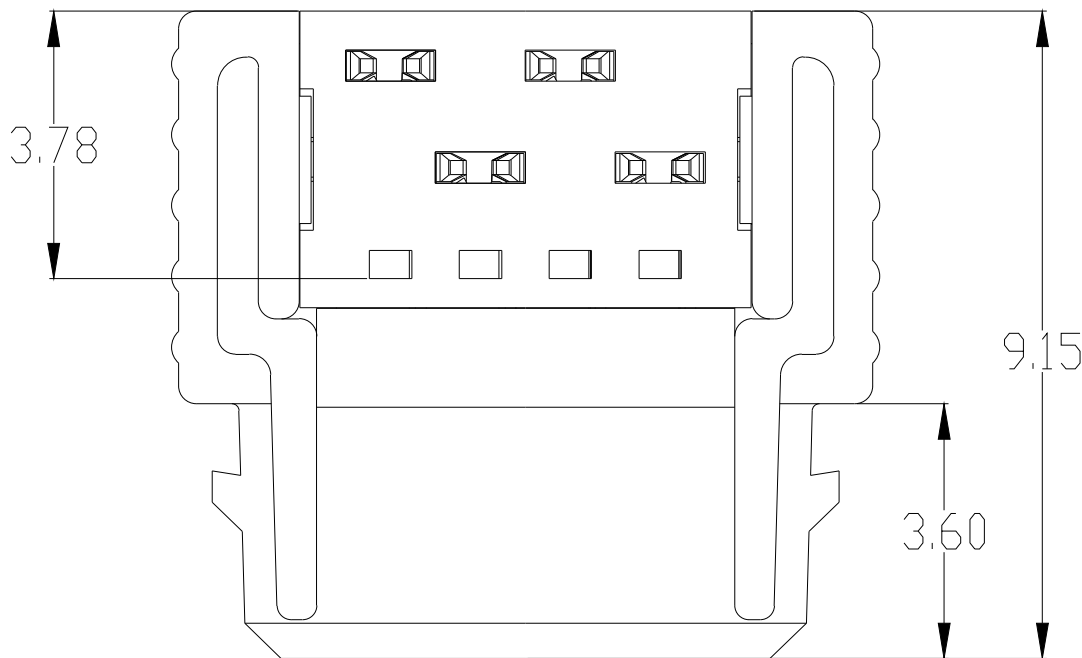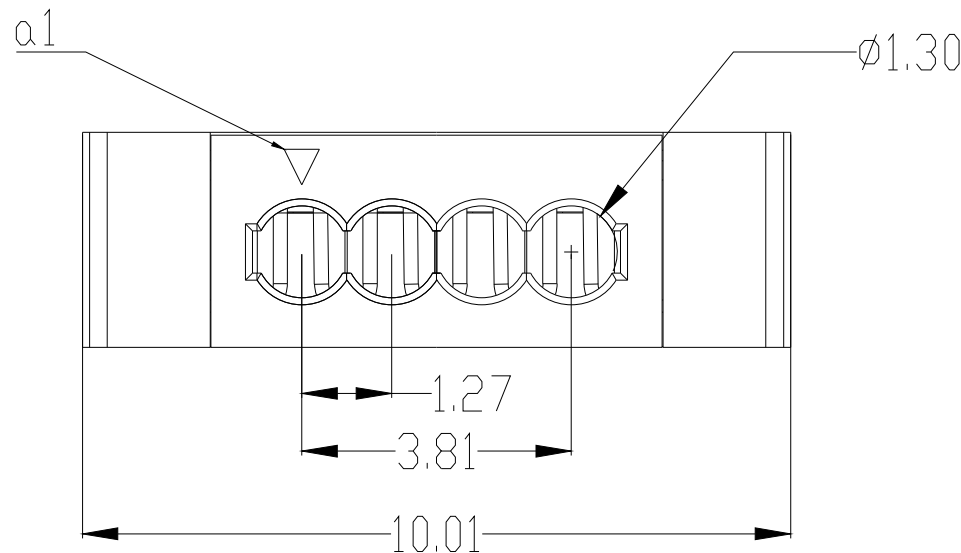

NOTES:

- THE PRODUCTS ARE RoHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING:PA4T-GF30THREMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT:COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION		NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES= ±2° DEFAULT LINEAR TOLERANCES SEE TABLE ----- DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; LEGENDS:  = FLAG NOTE CALL OUT REFERENCE ONLY		MATERIAL SPEC.		APPROVALS		DATE	上海良速电子有限公司 Powerlite 1.27mm Single Row 04pin Female 180°C cable outlet		
		SEE NOTES 2		PREPARED BY JUSTIN LI		Jun-30-20			
				ENGINEER IN CHARGE TYLER QIU					
				DESIGN MANAGER TYLER QIU					
				DESIGN ACTIVITY GROUP					
PROCESS SPEC.		THIRD ANGLE PROJECTION		SIZE		DOCUMENT NO.	PL-FS04101	REV.	
		C		A					
		SCALE: 2:1		REF.		SHEET 1 OF 1			