






GENERAL TOLERANCE

DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

CUSTOMER DRAWING

REVISIONS

REV	DESCRIPTION	DATE
A	PRELIMINARY VERSION	2020-06-18

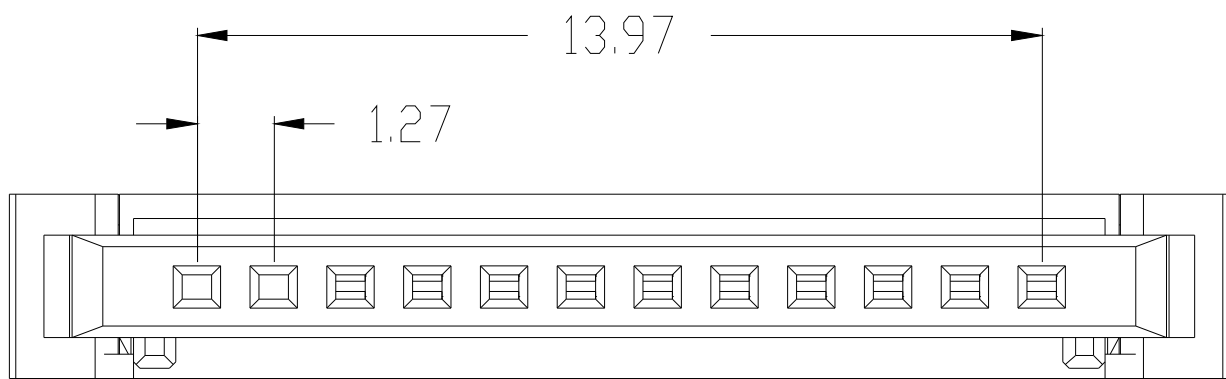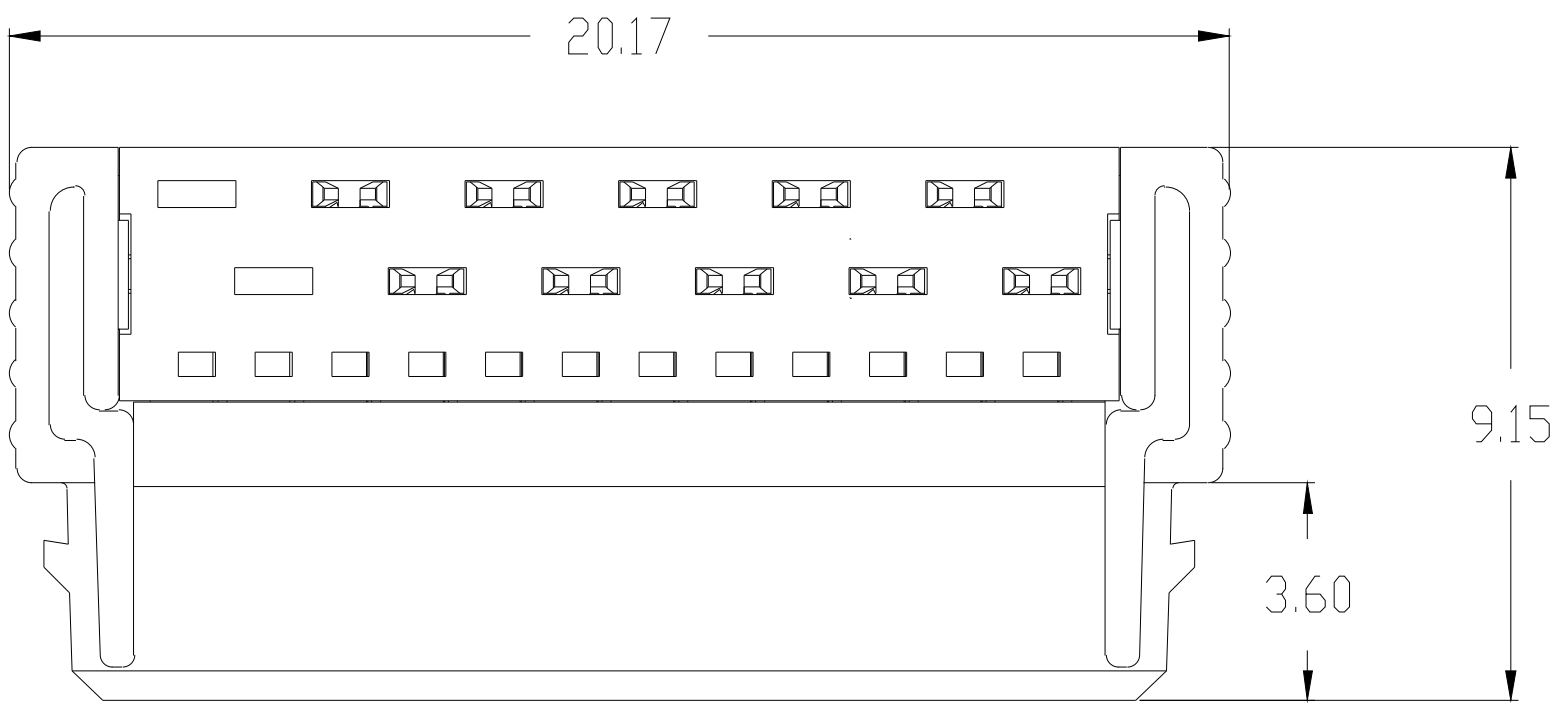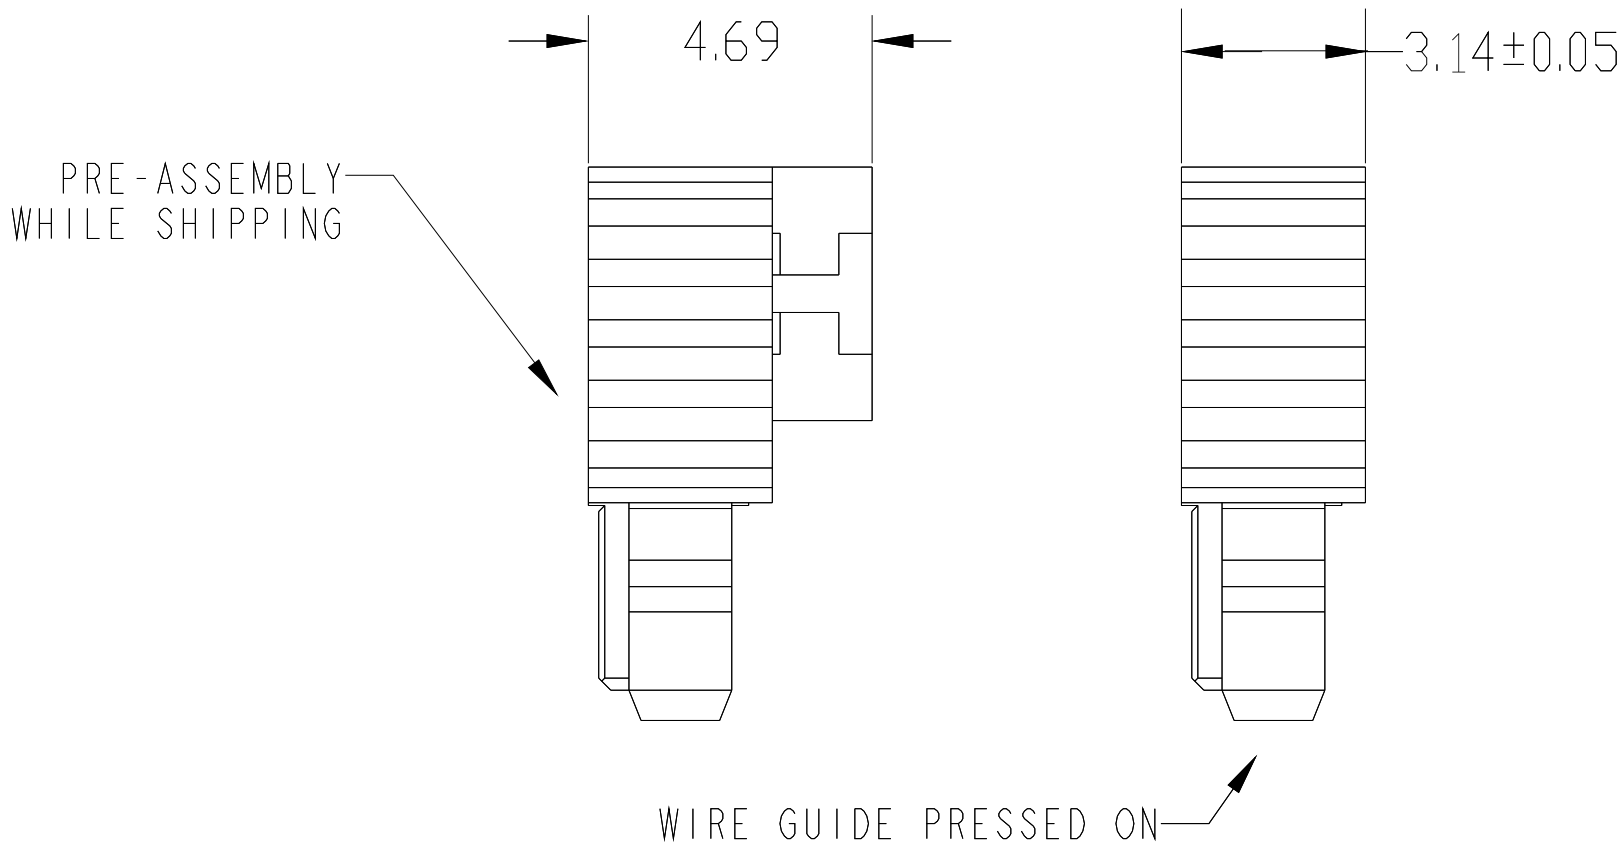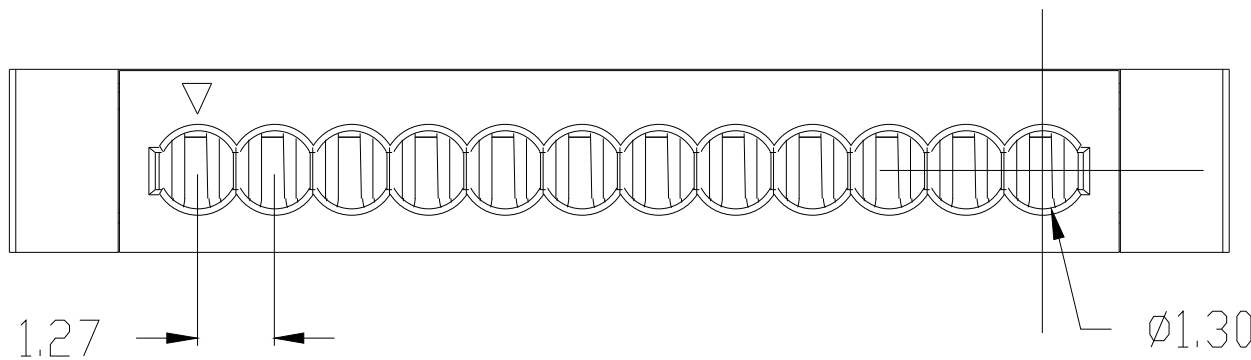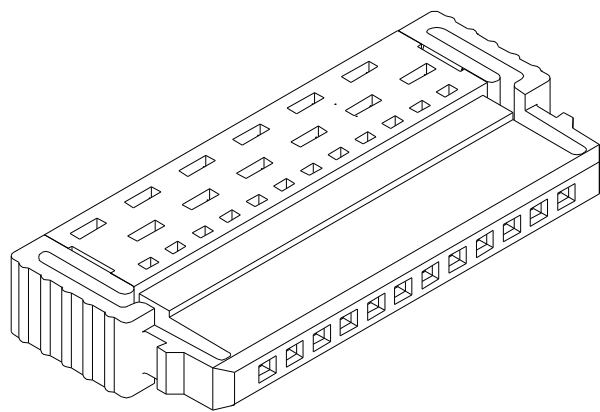

NOTES:

- THE PRODUCTS ARE ROHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING:PATHREMOPLASTIC,UL94 V-0,BLACK COLOR
CONTACT:COPPER ALLOY,
MATING AREA GOLD PLATING
OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS	POS	QTY	PART NUMBER	DESCRIPTION	NOTE	
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES= ±2° DEFAULT LINEAR TOLERANCES SEE TABLE ----- DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; LEGENDS: △=FLAG NOTE CALL OUT REFERENCE ONLY		MATERIAL SPEC.	APPROVALS		DATE	上海良速电子有限公司		
		SEE NOTES 2	PREPARED BY	TYLER OIU	Jun-18-20			
			ENGINEER IN CHARGE	TYLER OIU				
			DESIGN MANAGER	TYLER OIU				
			DESIGN ACTIVITY GROUP					
		PROCESS SPEC.	THIRD ANGLE PROJECTION		SIZE	DOCUMENT NO.	PL-FS12101	REV.
				C				A
		SCALE: 8		REF.		SHEET 1 OF 1		