
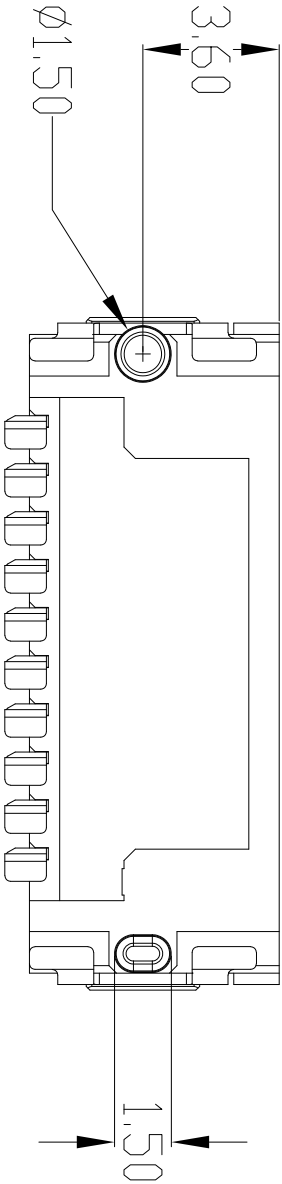
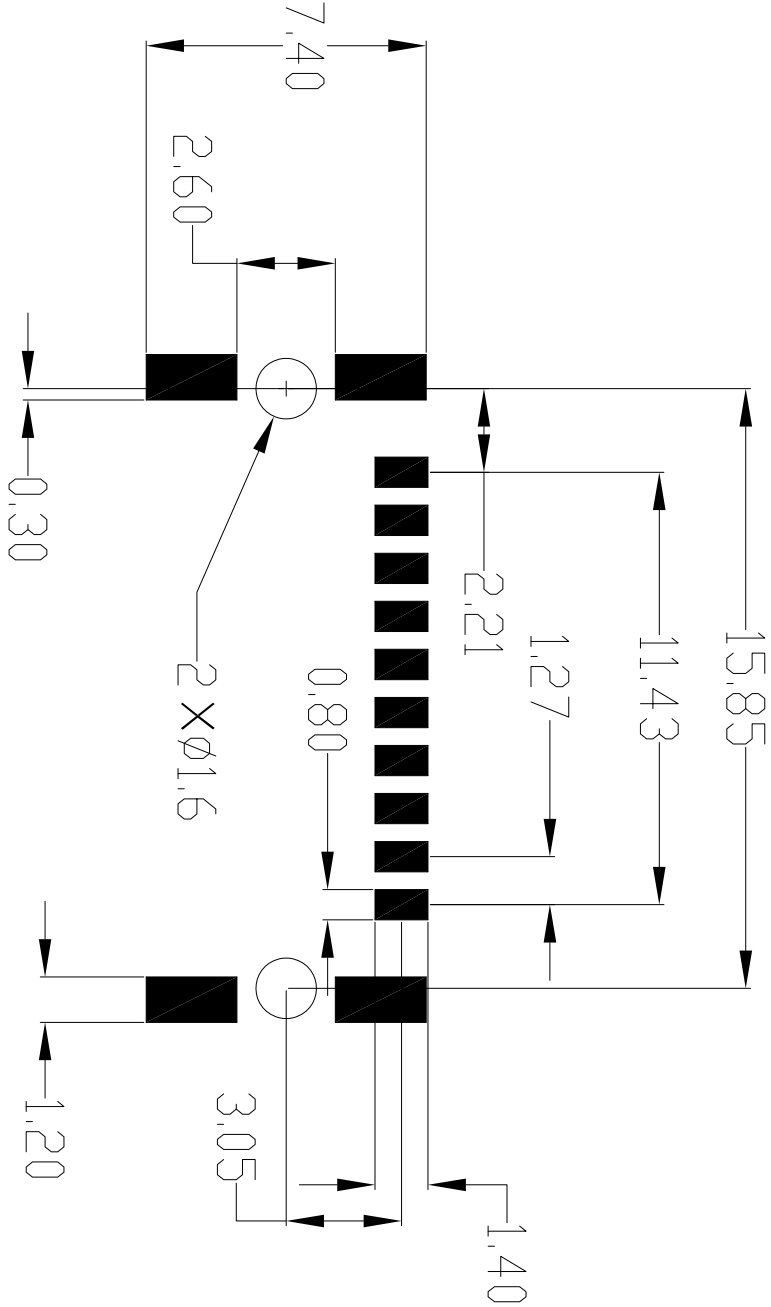
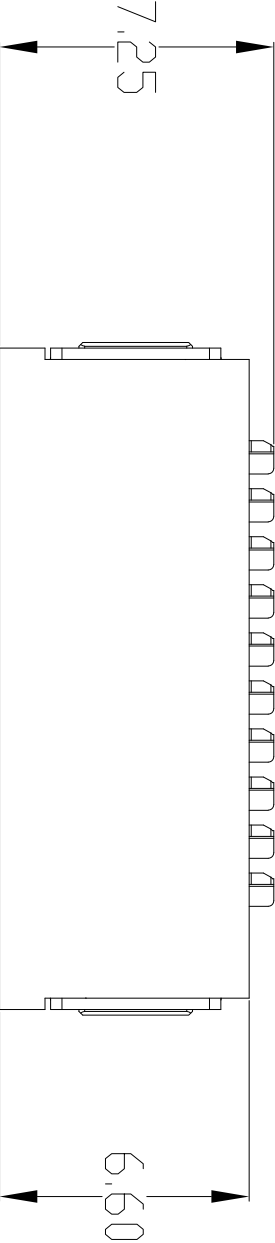
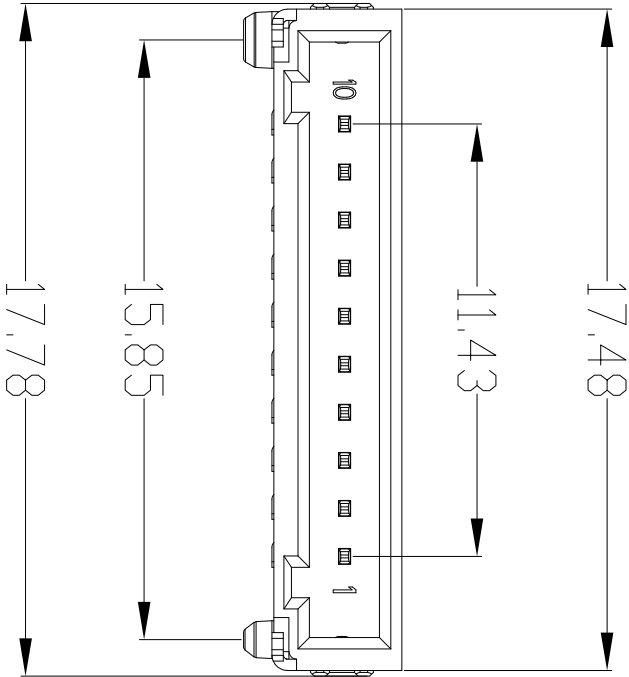
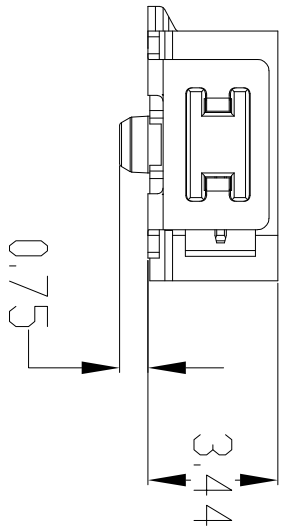


4

3

2


GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

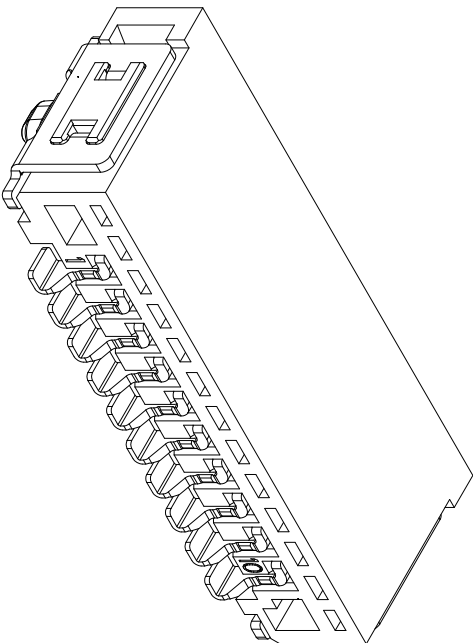

REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-06-30
B	Drawing templet update	2021-07-30

CUSTOMER DRAWING

- NOTES:
- THE PRODUCTS ARE ROHS COMPLIANCE.
 - MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC, UL94 V-0, BLACK COLOR.
CONTACT: COPPER ALLOY, MATING AREA GOLD PLATING, OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS		QTY		PART NUMBER		DESCRIPTION		NOTE	
LINEAR DIMENSIONS ARE IN: MILLIMETERS				MATERIAL SPEC.		APPROVALS		DATE		上海良速电子有限公司 Powerlite 1.27mm Single Row 10pin RA Male SMT Connector U			
TOLERANCES: ±2°				SEE NOTES 2		PREPARED BY JUSTIN LI		TYLER QIU					
ANGLES: ±2°				DEFAULT LINEAR TOLERANCES SEE TABLE		ENGINEER IN CHARGE TYLER QIU		DESIGN MANAGER TYLER QIU					
DIM & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000;				PROCESS SPEC.		DESIGN ACTIVITY GROUP		JUL 30 2021					
LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY				--		THIRD ANGLE PROJECTION							
										SCALE: REF. SHEET 1 OF 1			
SIZE		DOCUMENT NO.		PL-MA10101		REV/							
C						B							

A

B

C

4

3

2

1